
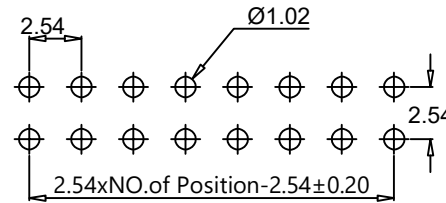


RoHS



受控

SPECIFICATION:

- Current Rating: 3Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance:20mΩ Max
 - Withstanding Voltage: 500VAC(1Min)
 - Max Processing Temp:230°-260°for 30-60s
 - Operation Temperature: -40℃ to +105℃
- Material:
- Insulator (Housing):PA6T (UL94V-0)
 - Contacts:Brass
 - Contact Plated: Gold Plated or Tin Plated

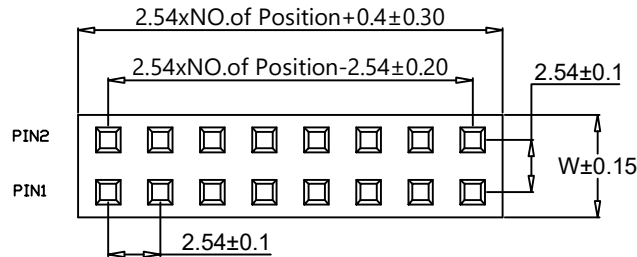

PCB LAYOUT

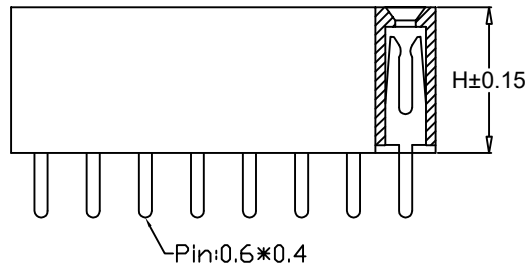

Ordering Information

FH254H xxx ST-2xx G A 0 301 Y

Insulator height
570=5.70mm
710=7.10mm
850=8.50mm

No.of Pins
220=2x20PIN

Plating
G=Gold Plated

Material
A=PA6T

Package
0=PE Bag
1=Tape&Reel
2=Tube
3=Tray

Contact
Y=Y shape
U=U shape

H	W	PC	PIN
5.70	5.00	3.00	0.60*0.40
7.10	5.00	3.00	0.64*0.40
8.50	5.00	3.00	0.64*0.40

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	LYao	SCALE	UNIT	SIZE	SHEET	PROJ.	TITLE:
AO	2021.04.13	NEW			X.X	±0.35			mm	A4	1/1		FH254HxxxST-2xxGA0301Y
					X.XX	±0.25							
					X.XXX	±0.15							
					Angle	± 3'							
					DIM	TOL							

SCONDAR
SCONDAR ELECTRONIC LIMITED

PART NO. FH254HxxxST-2xxGA0301Y
FH2.54 ST Gold flash PA6T 2XXP Female header