
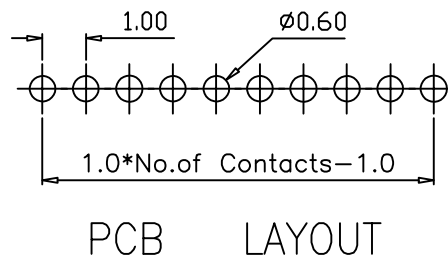




RoHS

受控

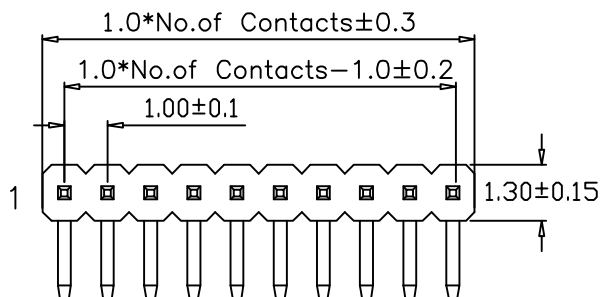

**SPECIFICATION:**

- Current Rating: 1A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30°C-60°C seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

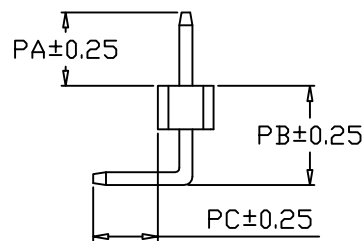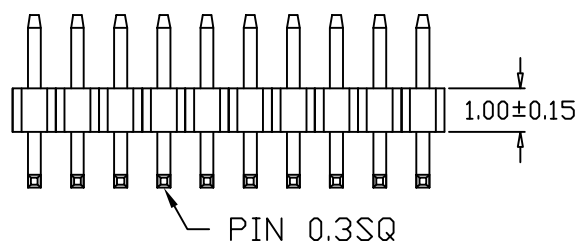

**Ordering Information**

PH100H100 RT- 1xx G A 0 301

Insulator height  
100=1.00mm

No. of Pins  
10=10PIN

Plating  
G=Gold Plated  
T=Tin Plated  
G2=Gold 2u"  
G10=Gold 10u"

Material  
A=PA6T

Package  
0=PE Bag  
1=Tape&Reel  
2=Tube  
3=Tray

**Dimension antitheses list**

ITEM	PA	PB	PC	L
Alternate	1.50	2.30	1.50	5.60

SCONDAR ELECTRONIC LTD  
ENGINEER LIU APPROVED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPR VE	PERATION	DRAW	Yang	2017.12.13	SCALE	-	<p>SCONDAR ELECTRONIC LIMITED</p>	
AO	2021.7.3	NEW			X.X	±0.35			UNIT	mm		
					X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15		2017.12.15	SHEET	1/1		
					Angle	± 3'			PR J.	☉	PART N .	PH100H100RT-1xxGA0301
					DIM	TOL					TITLE:	PH1.0 RT H1.0 PA1.5 PB2.3 PC1.5 L5.6 Gold flash PA6T 1XXP Pin header