


RoHS



受控

SPECIFICATION:

- Current Rating: 1A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30°C-60°C seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

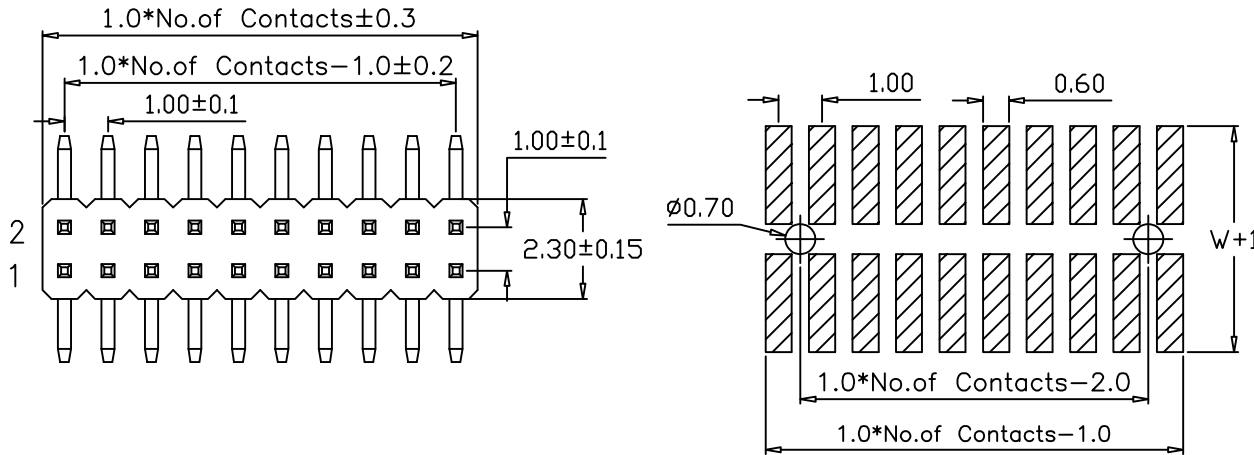

PCB LAYOUT

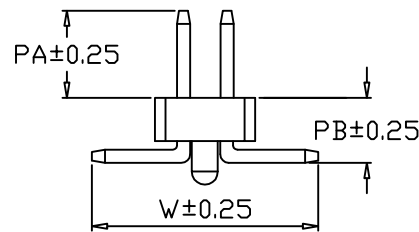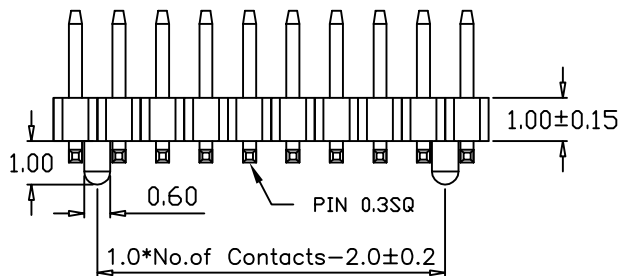

Ordering Information

PH100H xxx SMT F- 2xx G A 1 301

Insulator height
 100=1.00mm
 150=1.50mm

F=With Pole
 No. of Pins
 210=2x10PIN

Plating
 G=Gold Plated
 T=Tin Plated
 G2=Gold 2u"
 G10=Gold 10u"

Material
 A=PA6T

Package
 0=PE Bag
 1=Tube&Reel
 2=Tube
 3=Tray

Dimension antitheses list

PA	PB	W	L	H
2.00	1.50	5.20	5.20	1.00
2.00	2.00	5.20	5.70	1.50

SCONDAR ELECTRONIC LTD
 ENGINEER LIU APPROVED

OPERATION	DRAW	Yang	2017.3.06	SCALE	-
X.X ±0.35	DESIGN			UNIT	mm
X.XX ±0.25	CHECK	Lisa	2017.3.09	SIZE	A4
X.XXX ±0.15	APPROVE			SHEET	1/1
Angle ± 3'				PROJ.	☉
DIM TOL				TITLE:	

SCONDAR
 SCONDAR ELECTRONIC LIMITED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	PART NO.	PH100HxxxSMTF-2xxGA1301
AO	2021.7.03	NEW				
						PH1.0 SMT H1.0/2.0 PA2.0 PB1.5/2.0 W5.2 L5.2/5.7 Gold flash PA6T 1XXP Pin header