

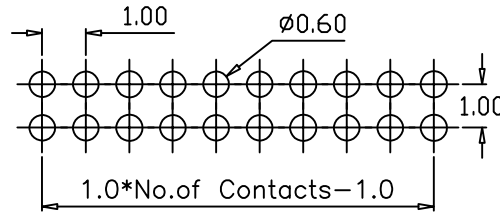
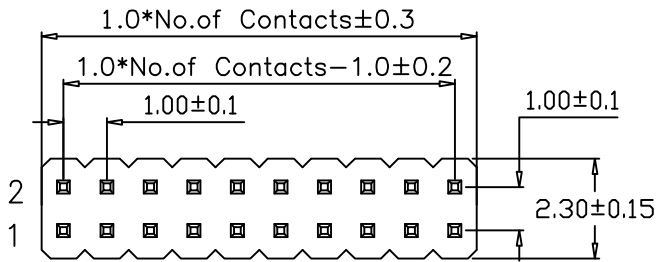


RoHS

受控



PCB LAYOUT

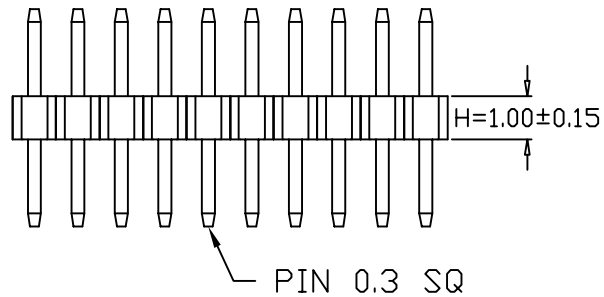

SPECIFICATION:

- Current Rating: 1A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30°C-60°C seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

Ordering Information

PH100Hxxx ST- 2xx G A 0 301

Insulator height
 100=1.00mm
 150=1.50mm

No. of Pins
 210=2X10PIN

Plating
 G=Gold Plated
 T=Tin Plated
 G2=Gold 2u"
 G10=Gold 10u"

Material
 A=PA6T

Package
 0=PE Bag
 1=Tape&Reel
 2=Tube
 3=Tray

Dimension antitheses list

PA	PC	L	H
2.00	2.00	5.00	1.00
2.00	2.00	5.50	1.50

SCONDAR ELECTRONIC LTD
 ENGINEER LIU APPROVED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	UNIT	SIZE	SHEET	PROJ.	PART NO.	TITLE:
AO	2021.7.5	NEW			X.X	Yang	2017.5.23	mm	A4	1/1		PH100HxxxST-2xxGA0301	PH1.0 ST H1.0/1.5 PA2.0 PC2.0 L5.0/5.5 Gold flash PA6T 2XXP Pin header
					X.XX								
					X.XXX	Lisa	2017.5.25						
					Angle								
					DIM								

SCONDAR
 SCONDAR ELECTRONIC LIMITED