



RoHS

受控

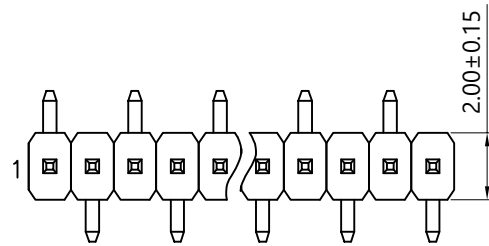



TYPE A

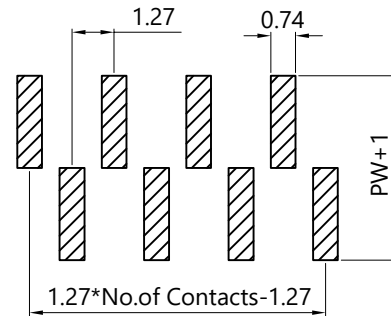

TYPE A PCB LAYOUT

SPECIFICATION:

- Current Rating: 1A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30°C-60°C seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

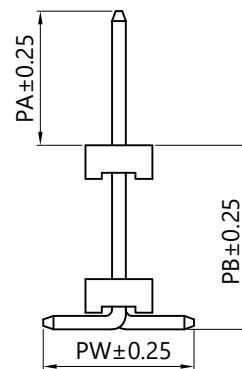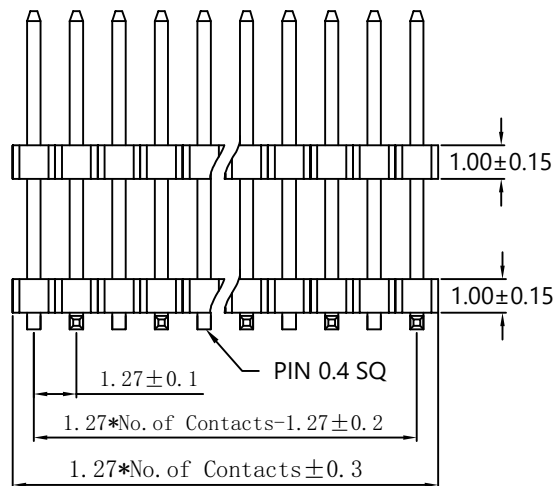

Ordering Information

PH127DH 100 SMT -1xx G A 1 301 A

Insulator height 100=1.00mm
 No. of Pins 110=1X10P
 Plating G=Gold Plated G2=Gold 2U" G3=Gold 3U" G10=Gold 10U" T=Tin Plated
 Material A=PA6T
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray
 PCB layout type A

Dimension antitheses list

ITEM	PA	PB	PW	L
Alternate	4.00	5.00	4.50	11.20

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2017.04.02	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
AO	2021.04.09	NEW			X.X	±0.35	DESIGN	LYao	2017.04.02	UNIT		mm
					X.XX	±0.25	CHECK	Lisa	2017.04.06	SIZE		A4
					X.XXX	±0.15	APPROVE			SHEET		1/1
					Angle	± 3'				PROJ.	⊕	
					DIM	TOL				TITLE:	PH127DH100SMT-1xxGA1301A	
											PH1.27 SMT DH1.0 PA4.0 PW4.5 Gold flash PA6T 1xxP	