



RoHS



受控

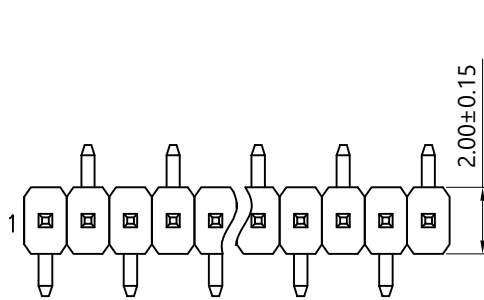

TYPE B

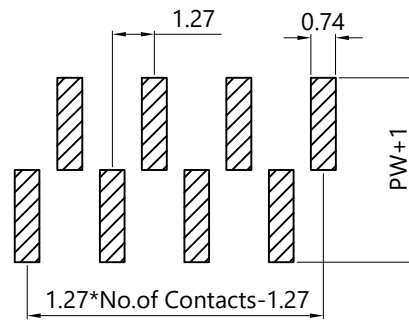

TYPE B PCB LAYOUT

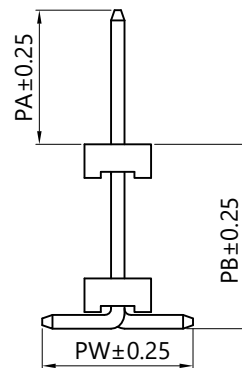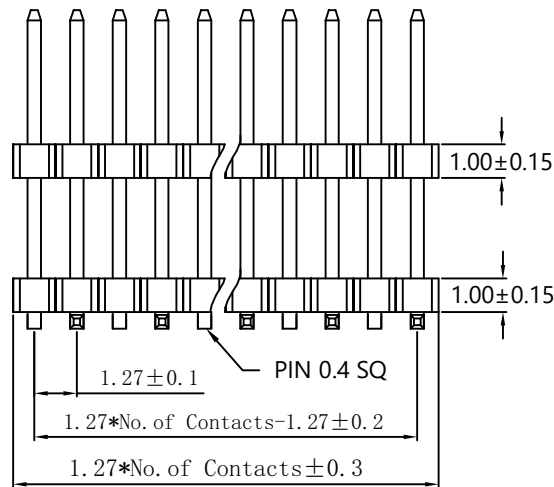

SPECIFICATION:

- Current Rating: 1A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30°C-60°C seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

Ordering Information

PH127DH 100 SMT -1xx G A 1 301 B

Insulator height 100=1.00mm No. of Pins 110=1X10P Plating G=Gold Plated G2=Gold 2U" G3=Gold 3U" G10=Gold 10U" T=Tin Plated Material A=PA6T Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray PCB layout type B

Dimension antitheses list

| ITEM | PA | PB | PW | L |
|-----------|------|------|------|-------|
| Alternate | 4.00 | 5.00 | 4.50 | 11.20 |

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

| | | | | | | | | | | | | |
|-----|------------|--------------------------|--------|---------|-----------|-------|---------|------------|--------|------|--------------------------------|---|
| | | | | | OPERATION | DRAW | Peng | 2017.04.02 | SCALE | - | SCONDAR ELECTRONIC LIMITED | |
| | | | | | X.X | ±0.35 | | | UNIT | mm | | |
| | | | | | X.XX | ±0.25 | | | DESIGN | LYao | | |
| | | | | | X.XXX | ±0.15 | | | CHECK | Lisa | | |
| AO | 2021.04.09 | NEW | | | Angle | ± 3' | | | SHEET | 1/1 | PART NO. | PH127DH100SMT-1xxGA1301B |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | DIM | TOL | APPROVE | | PROJ. | ☞ | TITLE: | PH1.27 SMT DH1.0 PA4.0 PB5.0 PW4.5 Gold flash PA6T 1xxP |