
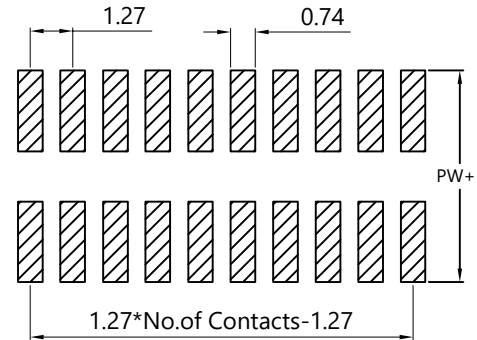


RoHS



受控

**SPECIFICATION:**

- Current Rating: 1A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30°C-60°C seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

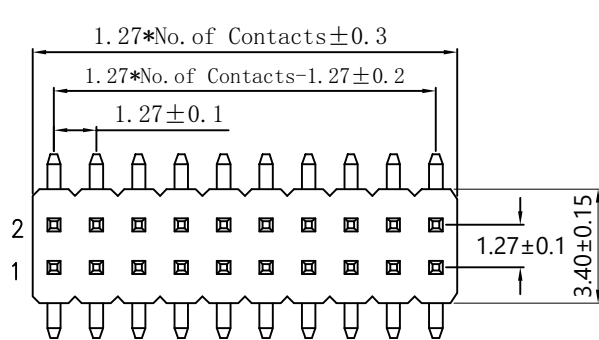

**PCB LAYOUT**

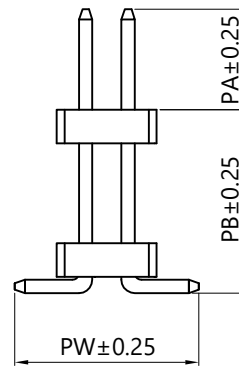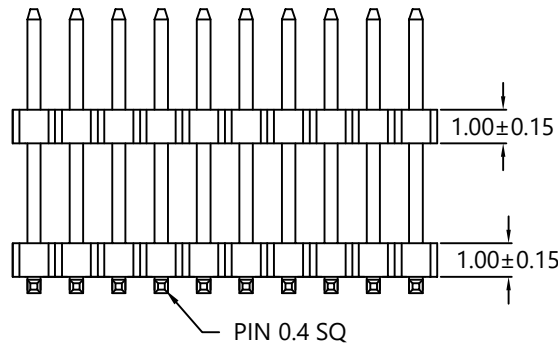

**Ordering Information**

PH127 DH 100 SMT -2xx G A 1 301

- Insulator height 100=1.00mm
- No. of Pins 210=2X10P
- Plating G=Gold Plated G2=Gold 2U" G3=Gold 3U" G10=Gold 10U" T=Tin Plated
- Material A=PA6T
- Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

**Dimension antitheses list**

ITEM	PA	PB	PW	L
Alternate	4.00	7.50	5.50	13.20

SCONDAR ELECTRONIC LTD  
ENGINEER LIU APPROVED

OPERATION	DRAW	Peng	2017.06.06
X.X ±0.35	DESIGN	LYao	2017.06.06
X.XX ±0.25	CHECK	Lisa	2017.06.10
X.XXX ±0.15	APPROVE		
Angle ± 3'			
DIM TOL			

SCALE: -

UNIT: mm

SIZE: A4

SHEET: 1/1

PROJ.

PART NO. PH127DH100SMT-2xxGA1301

TITLE: PH127 SMT DH1.0 PA4.0 PW5.5 Gold flash PA6T 2xxP

AO	2021.04.02	NEW		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE