
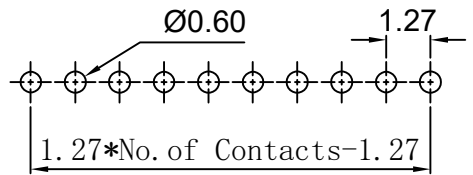




RoHS

受控

SPECIFICATION:
 -Current Rating: 1A AC/DC
 -Contact resistance: 20mΩ(Max).
 -Insulation Resistance: 1000MΩ Min
 -Withstanding Voltage: 500VAC(1Min)
 -Operation Temperature: -40°C to +105°C
 -Max Processing Temp:230°C-260°C for 30°C-60°C seconds
 -Material:
 -Insulator : Glass filled PA6T (UL94V-0), black
 -Contacts: Brass

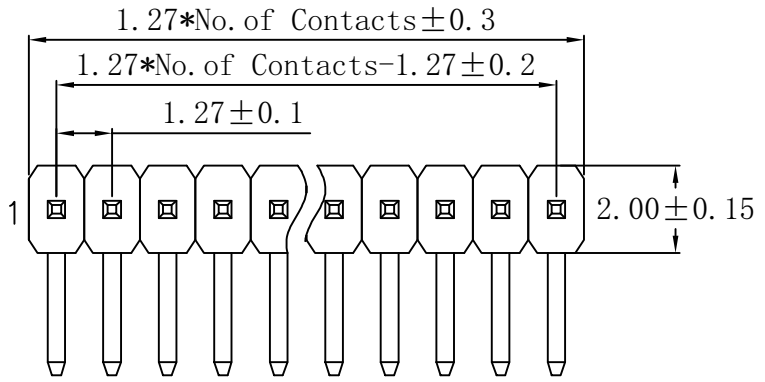

PCB LAYOUT

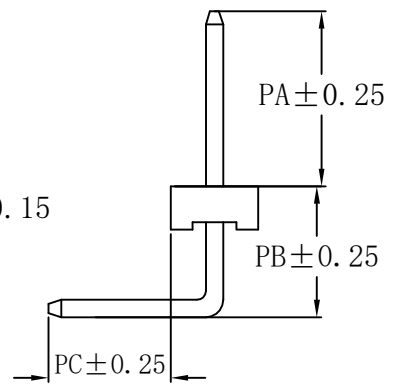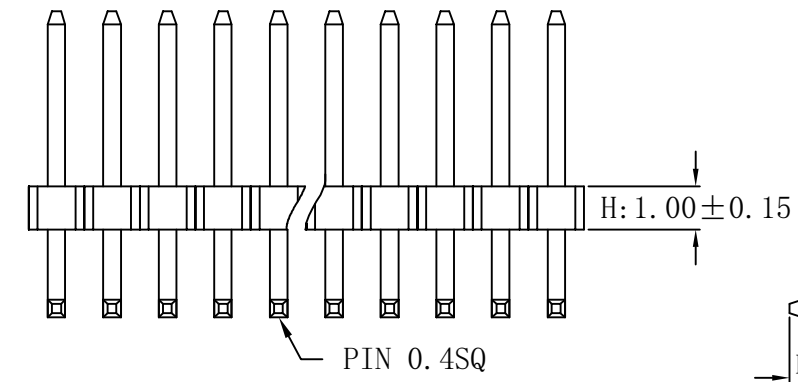

Ordering Information

PH127Hxxx RT- 1xx G A 0 301

Insulator height: 100=1.00mm, 150=1.50mm, 200=2.00mm, 250=2.50mm
 No. of Pins: 120=1X20PIN
 Plating: G=Gold Plated, T=Tin Plated, G2=Gold 2u", G10=Gold 10u"
 Material: A=PA6T
 Package: 0=PE Bag, 1=Tape&Reel, 2=Tube, 3=Tray

Dimension antitheses list				
PA	PB	PC	L	H
4.00	3.00	2.80	10.40	1.00
4.00	3.00	2.80	10.90	1.50
4.00	3.00	2.80	11.40	2.00
4.00	3.00	2.80	11.90	2.50

SCONDAR ELECTRONIC LTD
 ENGINEER LIU APPROVED

AO	2021.7.25	NEW			PERATION	DRAW	Yang	2017.3.21	SCALE	-	<p>SCONDAR ELECTRONIC LIMITED</p>
					X.X	±0.35			UNIT	mm	
					X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15			SHEET	1/1	
REV	DATE	M DIFICATI N	DESCRIPTI N	CHANGE	APPR VE	APPROVE			PR J.	⊕	TITLE:
											PH127HxxxRT-1xxGA0301
											PH1.27 RT H1.0 PA4.0 PB3.0 PC2.8 L10.4 Gold flash PA6T 1XXP Pin header