



RoHS

受控

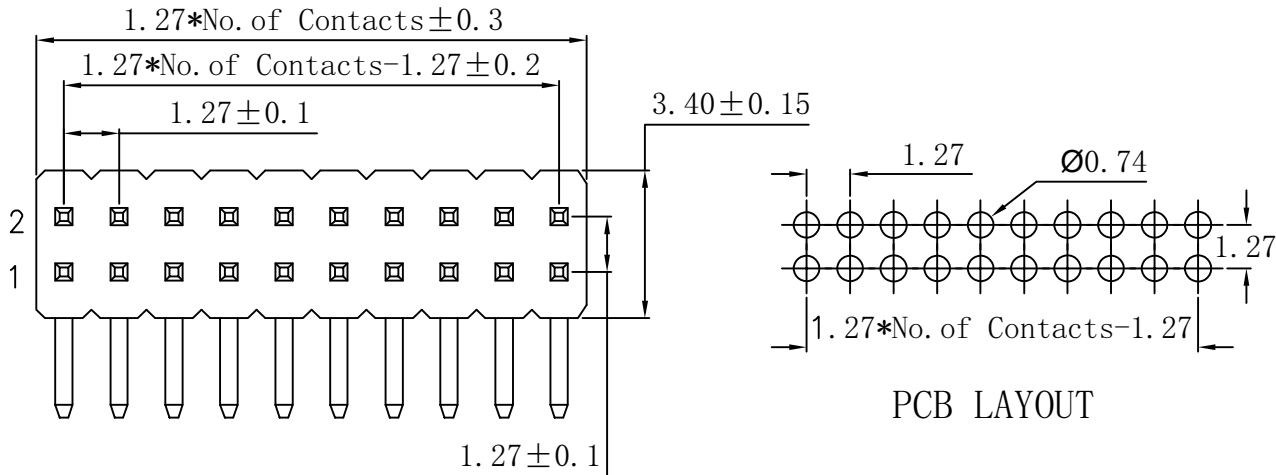

PCB LAYOUT

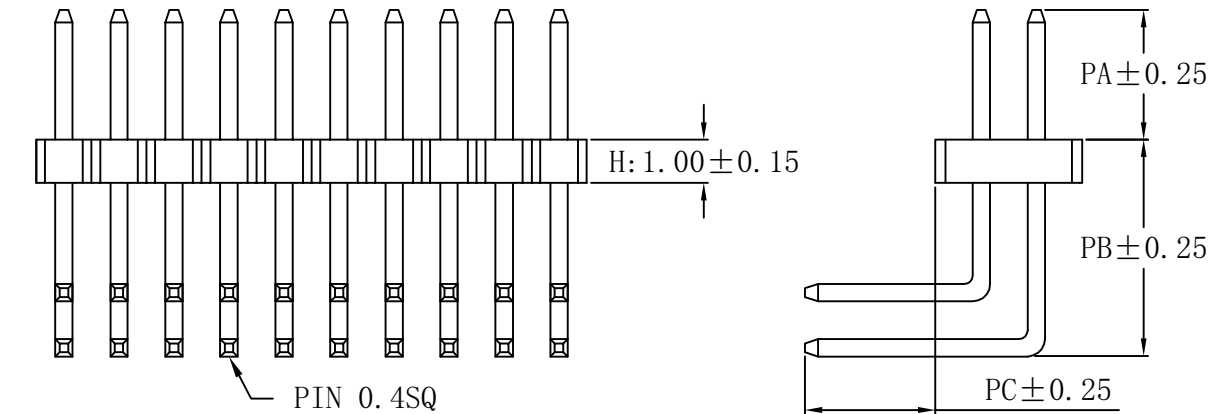

SPECIFICATION:

- Current Rating: 1A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30°C-60°C seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

Ordering Information

PH127Hxxx RT- 2xxx G A 0 301

- Insulator height: 100=1.00mm, 150=1.50mm, 200=2.00mm, 250=2.50mm
- No. of Pins: 220=2X20PIN
- Plating: G=Gold Plated, T=Tin Plated, G2=Gold 2u", G10=Gold 10u"
- Material: A=PA6T
- Package: 0=PE Bag, 1=Tape&Reel, 2=Tube, 3=Tray

Dimension antitheses list

PA	PB	PC	LS	LL	H
3.00	5.00	3.00	10.40	13.00	1.00
3.00	5.00	3.00	10.90	13.50	1.50
3.00	5.00	3.00	11.40	14.00	2.00
3.00	5.00	3.00	11.90	14.50	2.50

SCONDAR ELECTRONIC LTD
ENGINEER LTD APPROVED

PERATION	DRAW	Yang	2017.3.21	SCALE	-
X.X ±0.35	DESIGN	LYao	2017.3.21	UNIT	mm
X.XX ±0.25	CHECK	Lisa	2017.3.25	SIZE	A4
X.XXX ±0.15	APPROVE			SHEET	1/1
Angle ± 3'				PR J.	☉
DIM TOL				TITLE:	

SCONDAR
SCONDAR ELECTRONIC LIMITED

AO	2021.7.25	NEW															
REV	DATE	M DIFICATI N	DESCRIPTI N	CHANGE	APPR VE												

PART N . PH127HxxxRT-2xxGA0301
PH1.27 RT H1.0 PA3.0 PB5.0 PC3.0 L#13
Gold flash PA6T 2XXP Pin header