

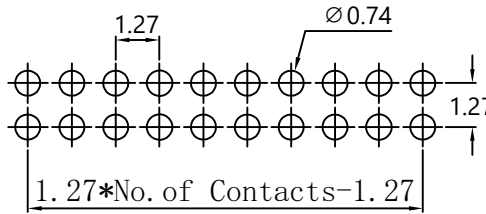
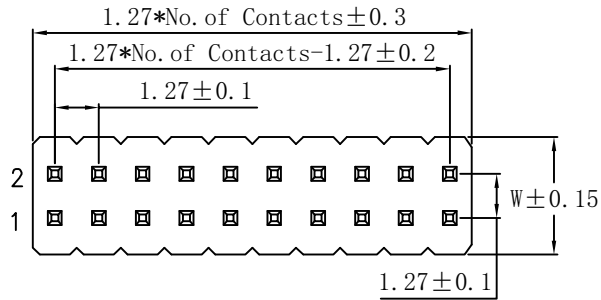


RoHS

受控



PCB LAYOUT

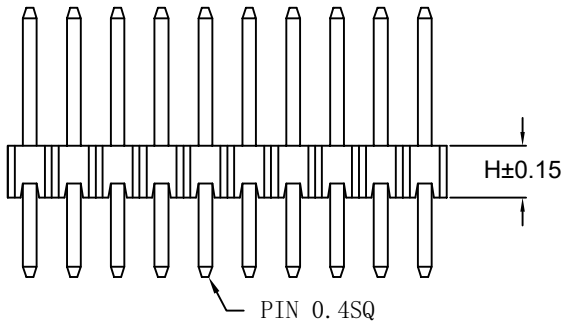

SPECIFICATION:

- Current Rating: 1A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30°C-60°C seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

Ordering Information

PH127Hxxx ST- 2xx G A 0 301

Insulator height
100=1.00mm
150=1.50mm
160=1.60mm
200=2.00mm
250=2.50mm

No. of Pins
220=2X20PIN

Plating
G=Gold Plated
T=Tin Plated
G2=Gold 2u"
G10=Gold 10u"

Material
A=PA6T

Package
0=PE Bag
1=Tape&Reel
2=Tube
3=Tray

Dimension antitheses list

PA	PC	W	L	H
3.90	2.30	3.40	7.20	1.00
4.00	2.30	3.40	7.80	1.50
4.00	2.30	3.00	7.90	1.60
4.00	2.30	3.00	8.30	2.00
4.00	2.30	3.00	8.80	2.50

SCONDAR ELECTRONIC LTD
ENGINEER LTD APPROVED

OPERATION	DRAW	Yang	2017.4.03
X.X ±0.35	DESIGN	Lyao	2017.4.03
X.XX ±0.25			
X.XXX ±0.15	CHECK	Lisa	2017.4.06
Angle ± 3'	APPROVE		
DIM TOL			

SCALE	-
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	☉

		SCONDAR ELECTRONIC LIMITED	
		PART NO.	PH127HxxxST-2xxGA0301
TITLE:	PH1.27 H1.0 ST Gold flash PA6T 2XXP Pin header		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
AO	2021.5.09	NEW		