
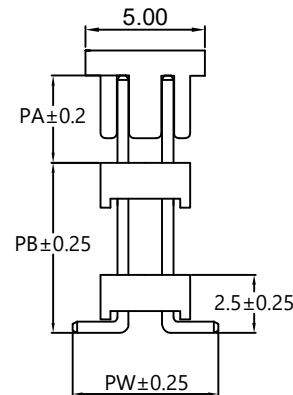
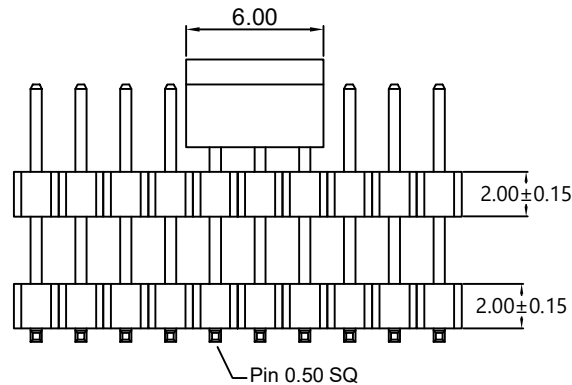
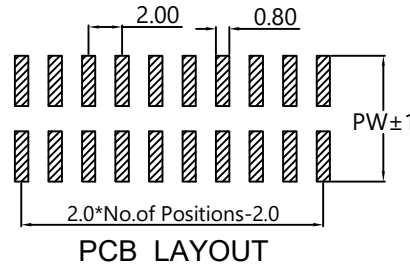


RoHS

受控

SPECIFICATION:

- Current Rating: 1.5A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp:230°C-260°C for 30-60 seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

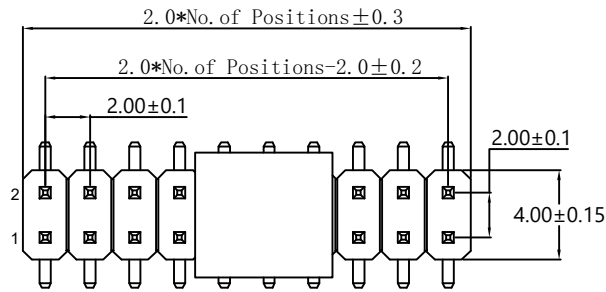

Ordering Information

PH200DH 200 SMT -2xx G A 1 301

Insulator height
200=2.00mm

No. of Pins
210=2X10P

Plating
G=Gold Plated
G2=Gold 2U"
G3=Gold 3U"
G10=Gold 10U"
T=Tin Plated

Material
A=PA6T

Package
0=PE Bag
1=Tape&Reel
2=Tube
3=Tray

Dimension antitheses list

ITEM	PA	PB	PW	L
Alternate	4.00	10.30	6.50	16.00

SCONДАР ELECTRONIC LTD
ENGINEER LIU APPROVED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	UNIT	SIZE	SHEET	PROJ.	TITLE:
AO	2021.06.15	NEW			X.X	Lyao	—	mm	A4	1/1		PH200DH200SMT-2xxGA1301
					X.XX							
					X.XXX	Lisa	2017.06.25					
					Angle							
					DIM							
					TOL							

SCONДАР
SCONДАР ELECTRONIC LIMITED

PH2.0DH2.0 SMT L16.0 PW6.5 PB10.30 PA4.0 Gold flash PA6T 2XXPIN header reel&tap with cap