
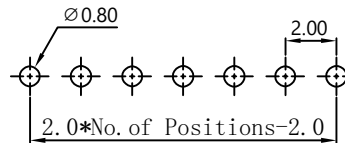


RoHS



受控

**SPECIFICATION:**

- Current Rating: 1.5A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30-60 seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

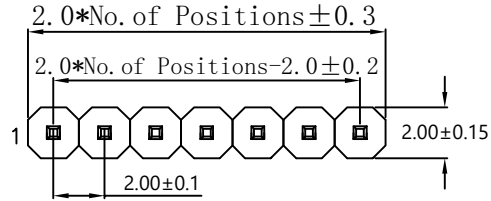

PCB LAYOUT

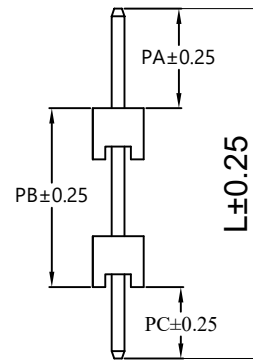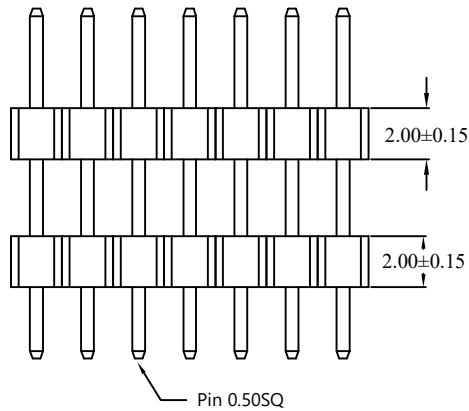


**Ordering Information**

PH200DH200 ST- 1xx G A 0 301

Insulator height 200=2.00mm  
 No. of Pins 20=20PIN  
 Plating G=Gold Plated T=Tin Plated G2=Gold 2u" G10=Gold 10u"  
 Material A=PA6T  
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

Dimension antitheses list				
ITEM	PA	PB	PC	L
Alternate	4.00	10.00	3.00	17.00

		SCONDAR ELECTRONIC LTD ENGINEER LIU APPROVED		OPERATION		DRAW	Peng	2017.06.11	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
				X.X ±0.35		DESIGN			UNIT	mm		
				X.XX ±0.25		CHECK	Lisa	2017.06.13	SIZE	A4		
AO	2021.06.09	NEW		Angle ± 3'		APPROVE			SHEET	1/1		PART NO.
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL		PROJ.	⌀	TITLE:	PH2.0 ST DH2.0 PA4.0 PC3.0 PB10.0 L17.0 Gold flash PA6T 1XXP Pin header