
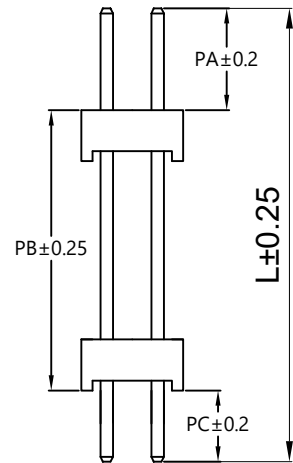
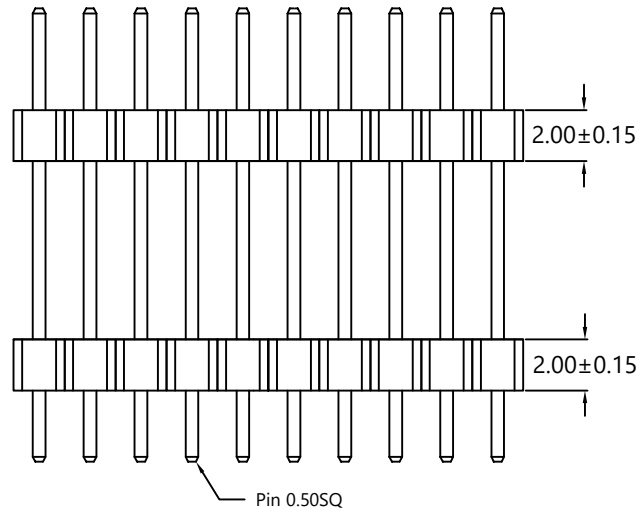


RoHS

受控

SPECIFICATION:

- Current Rating: 1.5A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30-60 seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

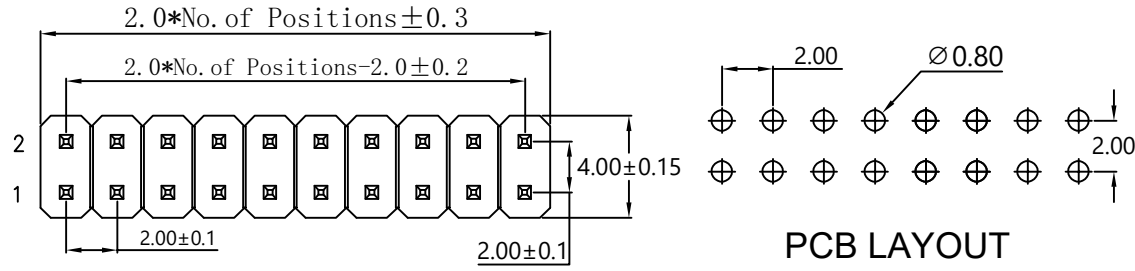

Ordering Information

PH200DH200 ST- 2xx G A 0 301

Insulator height 200=2.00mm
 No. of Pins 20=20PIN
 Plating G=Gold Plated T=Tin Plated G2=Gold 2u" G10=Gold 10u"
 Material A=PA6T
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

Dimension antitheses list

ITEM	PA	PB	PC	L
Alternate	4.00	13.00	2.80	19.80

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

AO	2021.06.09	NEW			OPERATION	DRAW	Peng	2017.06.11	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35			UNIT	mm		
					X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15			SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'			PROJ.	⊕	PART NO.	PH200DH200ST-2xxGA0301
					DIM	TOL					TITLE:	PH2.0 ST DH2.0 PA4.0 PB13.0 PC2.8 L19.8 Gold flash PA6T 2XXP Pin header