

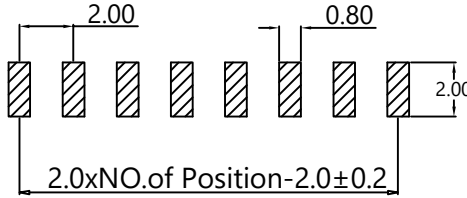
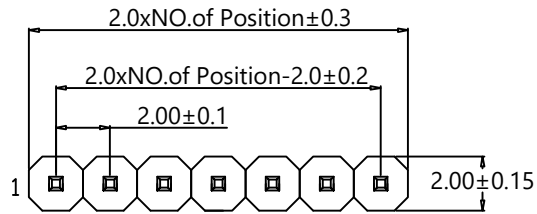


RoHS

受控



PCB LAYOUT

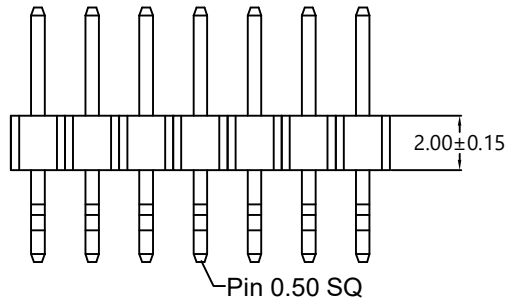

SPECIFICATION:

- Current Rating: 1.5A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp:230°C-260°C for 30-60 seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

Ordering Information

PH200 H 200 RMT-1xx L950 G A 1 301

Insulator height 200=2.00mm
 No.of Pins 210=2X10P
 Length L1350=13.50
 Plating G=Gold Plated G2=Gold 2U" G3=Gold 3U" G10=Gold 10U" T=Tin Plated
 Material A=PA6T
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

Dimension antitheses list			
ITEM	PA	PC	L
Alternate	4.00	3.40	9.50

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

AO	2021.06.09	NEW			OPERATION	DRAW	2017.06.11	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN		UNIT	mm		
					X.XX ±0.25	CHECK	2017.06.13	SIZE	A4		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	X.XXX ±0.15	APPROVE		SHEET	1/1	PART NO.	PH200H200RMT-1xxL950GA1301
					Angle ± 3'			PROJ.	⊕	TITLE:	PH2.0H2.0 SMT L9.5 PA4.0 PC3.4 Gold flash PA6T 1XXPIN header
					DIM TOL						