
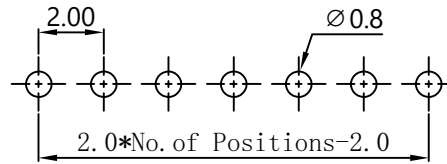


RoHS



受控

SPECIFICATION:

- Current Rating: 1.5A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30-60 seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

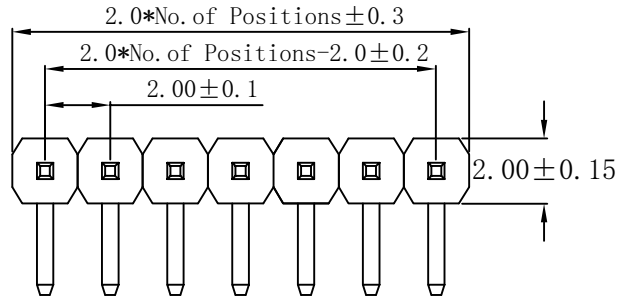

PCB LAYOUT

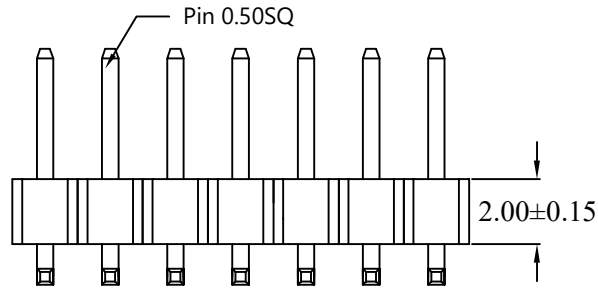

Ordering Information

PH200H200 RT- 1xx L1050 G A 0 301

- Insulator height 200=2.00mm
- No. of Pins 120=1X20PIN
- L105=10.5mm
- Plating G=Gold Plated T=Tin Plated G2=Gold 2u" G10=Gold 10u"
- Material A=PA6T
- Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

Dimension antitheses list

ITEM	PA	PB	PC	L
Alternate	4.00	3.25	2.80	10.50

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

OPERATION	DRAW	Peng	2017.04.02
X.X ±0.35	DESIGN	Lisa	2017.04.06
X.XX ±0.25			
X.XXX ±0.15	CHECK		
Angle ± 3'	APPROVE		
DIM TOL			

SCONDAR ELECTRONIC LIMITED

PART NO. PH200H200RT-1xxL1050GA0301

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	SCALE	UNIT	SIZE	SHEET	PROJ.	TITLE:
AO	2021.04.09	NEW			-	mm	A4	1/1		PH200H200RT-1xxL1050GA0301
										PH2.0 RT H2.0 PA4.0 PB3.25 PC2.8 L10.5 Gold flash PA6T 1XXP Pin header