
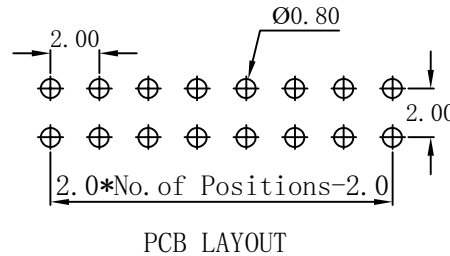


RoHS

受控

SPECIFICATION:

- Current Rating: 1.5A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30-60 seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

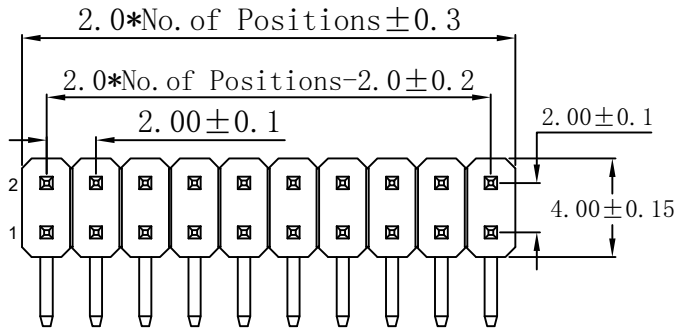

Ordering Information

PH200H200 RT - 2xx L1450 G A 0 301

Insulator height
200=2.00mm



No. of Pins
220=2X20PIN

1450=14.50mm

Plating
G=Gold Plated
T=Tin Plated
G2=Gold 2u"
G10=Gold 10u"

Material
A=PA6T

Package
0=PE Bag
1=Tape&Reel
2=Tube
3=Tray

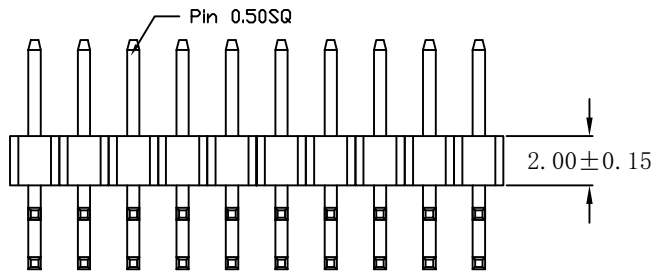

Dimension antitheses list

ITEM	PA	PB	PC	LS	LL
Alternate	4.00	5.30	2.80	10.50	14.50

SCONDR ELECTRONIC LTD
ENGINEER LIU APPROVED

OPERATION	DRAW	Peng	2017.04.02
X.X ±0.35	DESIGN	Lisa	2017.04.06
X.XX ±0.25			
X.XXX ±0.15	CHECK		
Angle ± 3'	APPROVE		
DIM TOL			

SCALE	UNIT	SIZE	SHEET	PROJ.	TITLE:
-	mm	A4	1/1	☉	PH200H200RT-2xxL1450GA0301
					PH2.0 RT H2.0 PA4.0 PB5.30 PC2.8 LS10.5 LL14.50 Gold flash PA6T 2XXP Pin header

SCONDR
SCONDR ELECTRONIC LIMITED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
AO	2021.04.09	NEW		