
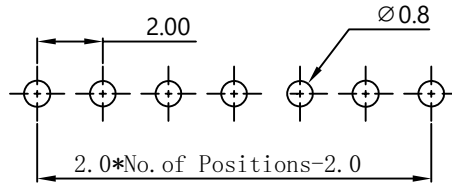


RoHS



受控

SPECIFICATION:

- Current Rating: 1.5A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30-60 seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

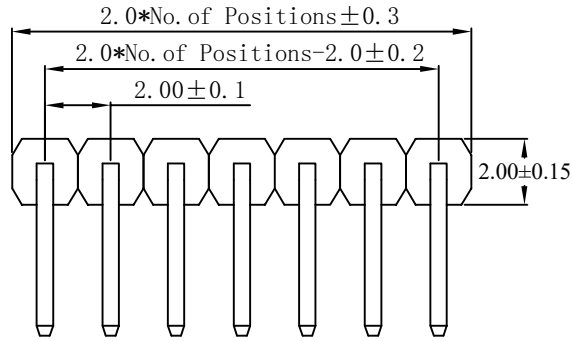

PCB LAYOUT

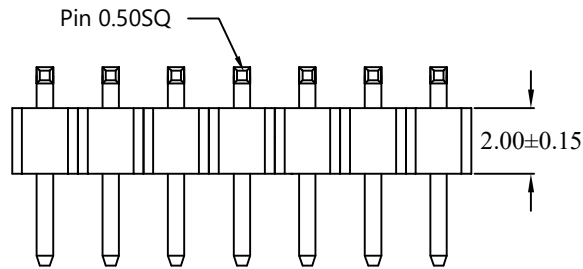

Ordering Information

PH200H200 RTF- 1xx L1050 G A 0 301

Insulator height 200=2.00mm
 No. of Pins 120=1X20PIN
 L1050=10.50mm
 Plating G=Gold Plated T=Tin Plated G2=Gold 2u" G10=Gold 10u"
 Material A=PA6T
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

Dimension antitheses list

ITEM	PA	PB	PC	L
Alternate	4.00	3.25	2.80	10.50

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

AO	2021.04.09	NEW			OPERATION	DRAW	Peng	2017.04.02	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35			UNIT	mm		
					X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15			SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'			PROJ.	⊕	PART NO.	PH200H200RTF-1xxL1050GA0301
					DIM	TOL					TITLE:	PH2.0 RTF H2.0 PA4.0 PB3.25 PC2.8 L10.5 Gold flash PA6T 1XXP Pin header