
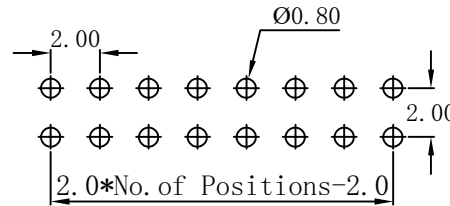


RoHS



受控

SPECIFICATION:

- Current Rating: 1.5A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30-60 seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

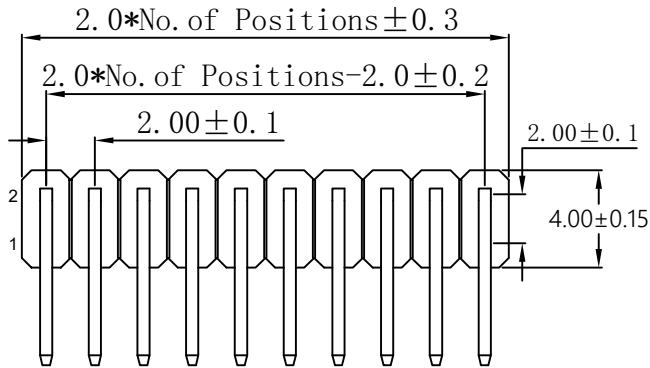

PCB LAYOUT

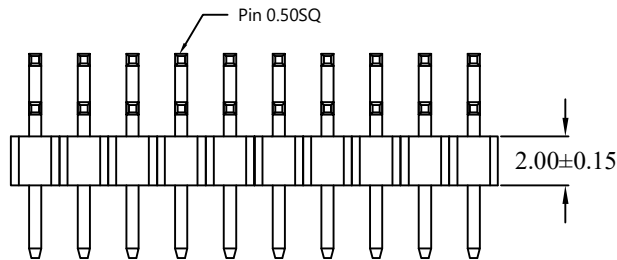

Ordering Information

PH200H200 RTF- 2xx L1450 G A 0 301

Insulator height 200=2.00mm
 No. of Pins 220=2X20PIN
 1450=14.50mm
 Plating G=Gold Plated T=Tin Plated G2=Gold 2u" G10=Gold 10u"
 Material A=PA6T
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

Dimension antitheses list

ITEM	PA	PB	PC	LS	LL
Alternate	4.00	5.30	2.80	10.50	14.50

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	UNIT	SIZE	SHEET	PROJ.	TITLE:
AO	2021.04.09	NEW			X.X	Peng	2017.04.02	mm	A4	1/1		PH200H200RTF-2xxL1450GA0301
					X.XX							PH2.0 RTF H2.0 PA4.0 PB5.30 PC2.8 LS10.5 LL14.50 Gold flash PA6T 2XXP Pin header
					X.XXX	Lisa	2017.04.06					
					Angle							
					DIM							
					TOL							

SCONDAR ELECTRONIC LIMITED

PH200H200RTF-2xxL1450GA0301