

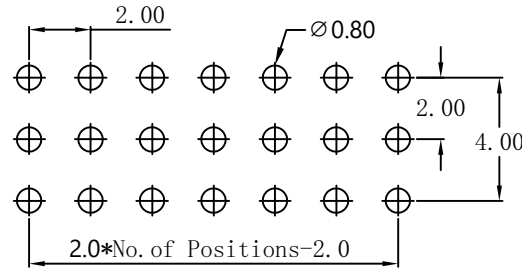
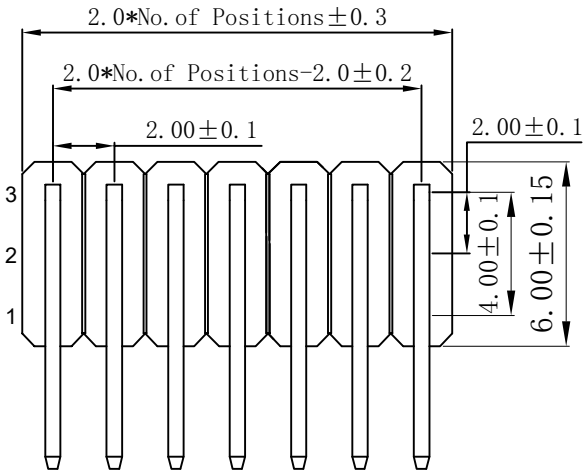


RoHS

受控

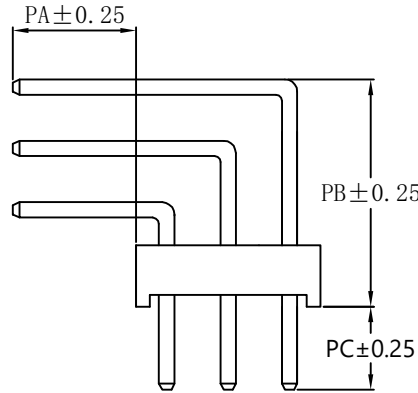


PCB LAYOUT

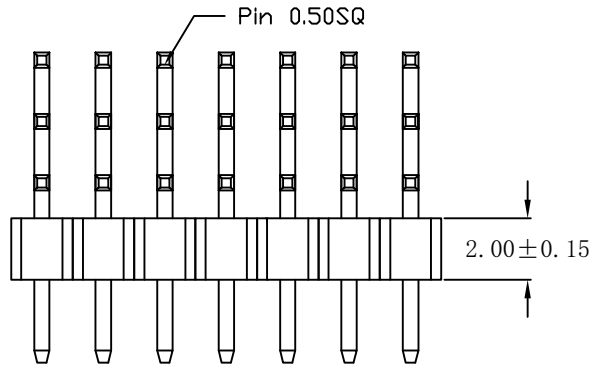

SPECIFICATION:

- Current Rating: 1.5A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30-60 seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

Ordering Information

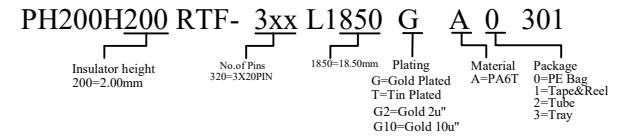

Dimension antitheses list

ITEM	PA	PB	PC	LS	LM	LL
Alternate	4.00	7.30	2.80	10.50	14.50	18.50

SCONDR ELECTRONIC LTD
ENGINEER LIU APPROVED

OPERATION	DRAW	Peng	2017.04.18
X.X ±0.35	DESIGN	Lisa	2017.04.22
X.XX ±0.25			
X.XXX ±0.15	CHECK		
Angle ± 3'	APPROVE		
DIM TOL			

SCALE	-		SCONDR ELECTRONIC LIMITED			
UNIT	mm		PART NO.	PH200H200RTF-3xxL1850GA0301		
SIZE	A4			PH2.0 RTF H2.0 PA4.0 PB7.30 PC2.8 LS10.5 LM14.5 LL18.50 Gold flash PA6T 3XXP Pin header		
SHEET	1/1	TITLE:				
PROJ.	⊕					

AO	2021.04.23	NEW		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE