
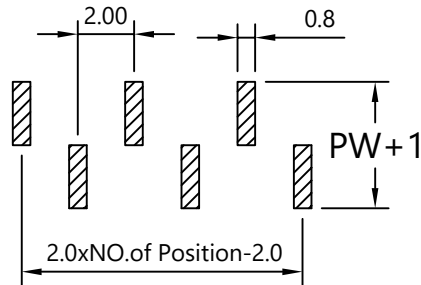


RoHS



受控

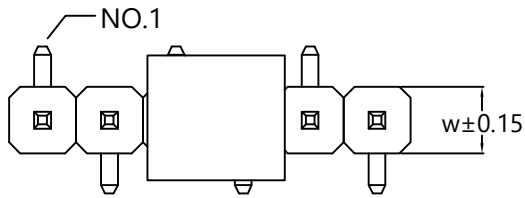

TYPE A  
PCB LAOUT

SPECIFICATION:

- Current Rating: 1.5A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp:230°C-260°C for 30-60 seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

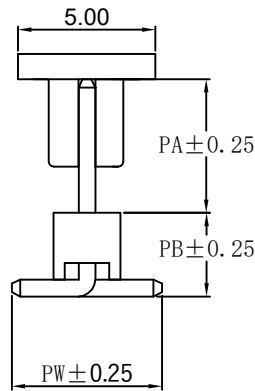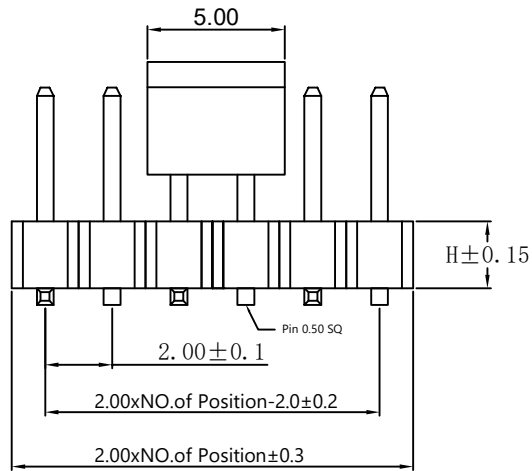

Ordering Information

PH200 H xxx SMT -1xx Lxxx G A 1 301 A

Insulator height: 150=1.50mm, 200=2.00mm  
 No.of Pins: 110=1X10P  
 770=7.70, 820=8.20, 900=9.00  
 Plating: G=Gold Plated, G2=Gold 2U", G3=Gold 3U", G10=Gold 10U", T=Tin Plated  
 Material: A=PA6T  
 Package: 0=PE Bag, 1=Tape&Reel, 2=Tube, 3=Tray  
 PCB layout typeA

Dimension antitheses list

PA	PB	PW	W	L	H
4.00	2.00	4.50	1.50	7.70	1.50
4.00	2.50	4.50	2.00	8.20	2.00
4.00	3.30	4.60	2.00	9.00	2.00

SCONDAR ELECTRONIC LTD  
ENGINEER LIU APPROVED

AO	2021.06.09	NEW			OPERATION	DRAW	Lyao	2017.06.11	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X	±0.35			UNIT	mm	
					X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15		2017.06.13	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'			PART NO.	PH200H200SMT-1xxL820GA1301A	
					DIM	TOL	APPROVE		TITLE:	PH2.0 SMT Gold flash PA6T 1XXPIN header reel&tap with cap	