
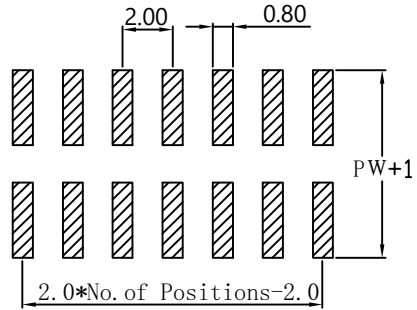


RoHS



受控

SPECIFICATION:

- Current Rating: 1.5A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30-60 seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

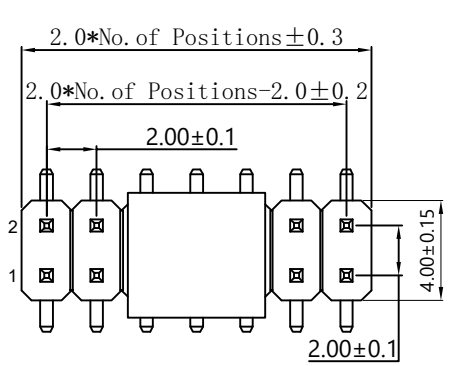

PCB LAYOUT

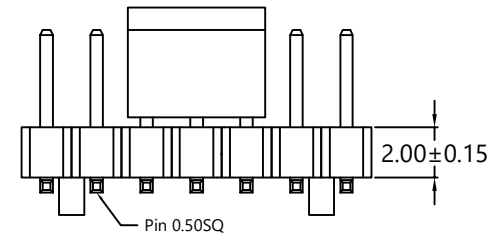

Ordering Information

PH200 H 200 SMT -2xx G A 1 301

Insulator height 200=2.00mm
 No. of Pins 210=2X10P
 Plating G=Gold Plated G2=Gold 2U" G3=Gold 3U" G10=Gold 10U"
 Material A=PA6T
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray
 T= Tin Plated

Dimension antitheses list				
ITEM	PA	PB	PW	L
Alternate	4.00	2.50	6.50	8.20

SCONDAR ELECTRONIC LTD
 ENGINEER LIU APPROVED

AO	2021.06.11	NEW			OPERATION	DRAW	Lyao	2017.06.16	SCALE	-	<p>SCONDAR ELECTRONIC LIMITED</p>	
					X.X	±0.35			UNIT	mm		
					X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15			SHEET	1/1	PART NO.	PH200H200SMT-2xxGA1301
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'			PROJ.	⌀	TITLE:	PH2.0H2.0 SMT L8.2 PW6.5 PB2.5 PA4.0 Gold flash PA6T 2XXPIN header reel&tap with cap
					DIM	TOL						