
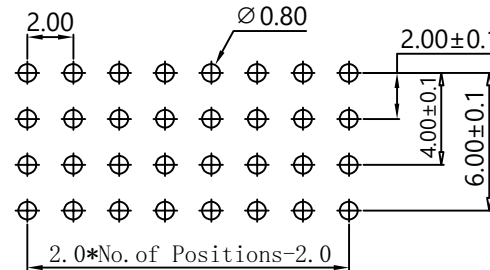


RoHS



受控

**SPECIFICATION:**

- Current Rating: 1.5A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30-60 seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

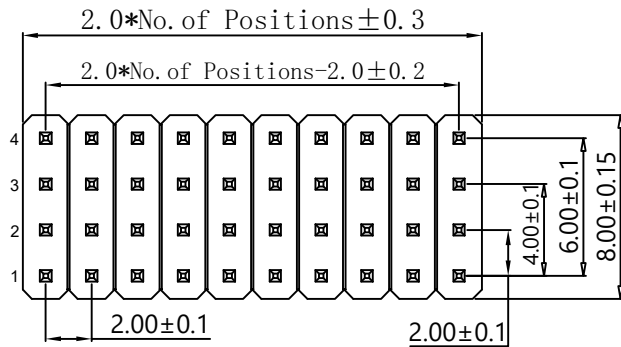

PCB LAYOUT

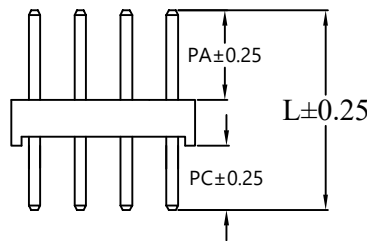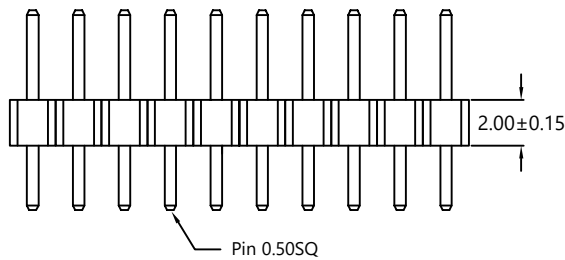

**Ordering Information**

PH200H200 ST- 4xx G A 0 301

Insulator height 200=2.00mm  
 No. of Pins 20=20PIN  
 Plating G=Gold Plated T=Tin Plated G2=Gold 2u" G10=Gold 10u"  
 Material A=PA6T  
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

Dimension antitheses list			
ITEM	PA	PC	L
Alternate	3.90	2.80	8.70

SCONDAR ELECTRONIC LTD  
 ENGINEER LJU APPROVED

AO	2021.06.09	NEW			OPERATION	DRAW	Peng	2017.06.11	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35			UNIT	mm		
					X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15			SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'			PROJECT	⊕	PART NO.	PH200H200ST-4xxGA0301
					DIM	TOL			TITLE:			PH2.0 ST H2.0 PA3.9 PC2.8 LB.7 Gold flash PA6T 4XXP Pin header