
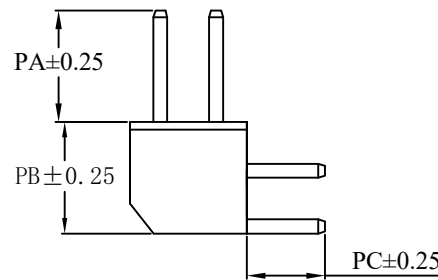
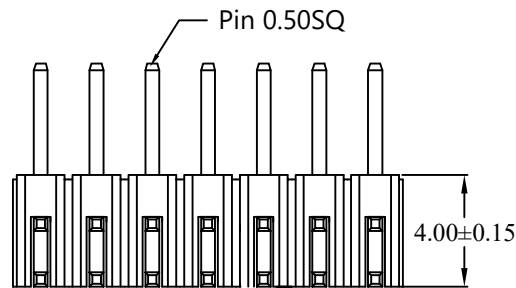
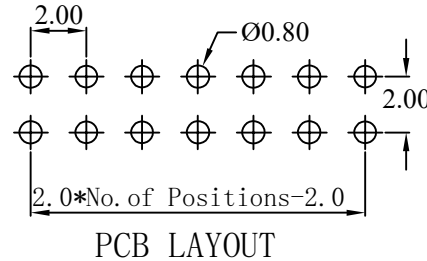


RoHS

受控

SPECIFICATION:

- Current Rating: 2A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30-60 seconds
- Material:
- Insulator :PA6T (UL94V-0), black
- Contacts: Brass

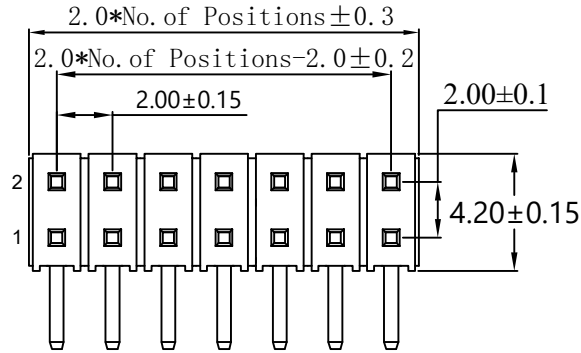

Ordering Information

PH200H400 RT- 2XX L1320 G A 0 301

- Insulator height 400=4.00mm
- No. of Pins 220=2X20PIN
- 1320=13.20mm
- Plating G=Gold Plated, T=Tin Plated, G2=Gold 2u", G10=Gold 10u"
- Material A=PA6T
- Package 0=PE Bag, 1=Tape&Reel, 2=Tube, 3=Tray

Dimension antitheses list

ITEM	PA	PB	PC	LS	LL
Alternate	4.00	4.00	2.80	9.20	13.20

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	UNIT	SIZE	SHEET	PROJ.	TITLE:
AO	2021.04.19	NEW			X.X	Peng	—	mm	A4	1/1		PH200H400RT-2xxL1320GA0301
					X.XX	Lisa						PH2.0 RT H4.0 PA4.0 PB5.30 PC2.8 LS10.5 LL14.50 Gold flash PA6T 2XXP Pin header
					X.XXX							
					Angle							
					DIM							

SCONDAR ELECTRONIC LIMITED