
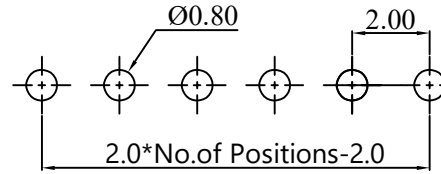


RoHS



受控

SPECIFICATION:

- Current Rating: 1.5A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp:230°C-260°C for 30-60 seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

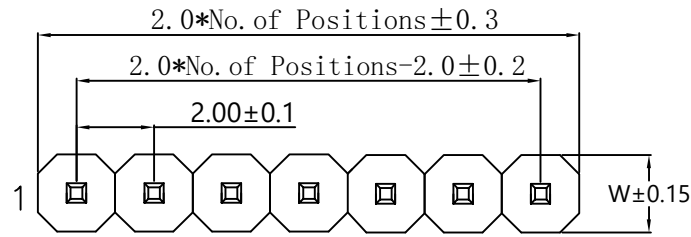

PCB LAOUT

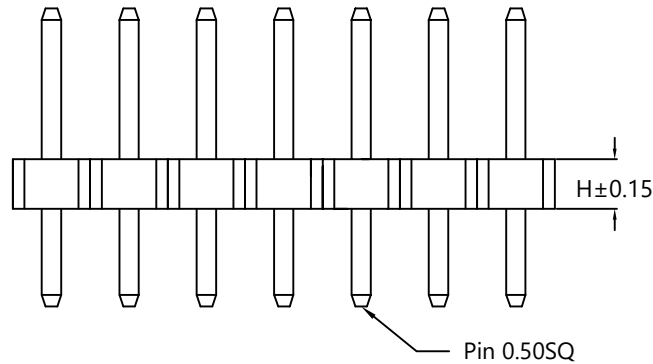

Ordering Information

PH200Hxxx ST- 1xx Lxxx G A 0 301

Insulator height: 100=1.00mm, 150=1.50mm, 200=2.00mm
 No. of Pins: 120=1X20PIN, 770=7.70, 820=8.20, 870=8.70
 Plating: G=Gold Plated, T=Tin Plated, G2=Gold 2u", G10=Gold 10u"
 Material: A=PA6T
 Package: 0=PE Bag, 1=Tape&Reel, 2=Tube, 3=Tray

Dimension antitheses list

PA	PC	W	L	H
3.90	2.80	2.00	7.70	1.00
3.90	2.80	2.00	8.20	1.50
3.90	2.80	2.00	8.70	2.00

SCONDAR ELECTRONIC LTD
ENGINEER LID APPROVED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	SCALE	UNIT	SIZE	SHEET	PROJ.	TITLE:
AO	2021.06.09	NEW			X.X	±0.35	Peng	2017.06.11	-			
					X.XX	±0.25			mm			
					X.XXX	±0.15			A4			
					Angle	± 3'	Lisa	2017.06.13		1/1		
					DIM	TOL						
										<p>SCONDAR ELECTRONIC LIMITED</p>		
										PART NO. PH200HxxxST-1xxLxxxGA0301 PH2.0 ST Gold flash PA6T 1XXP Single row Pin header		