

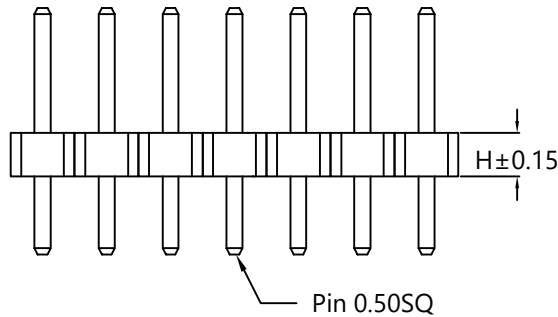
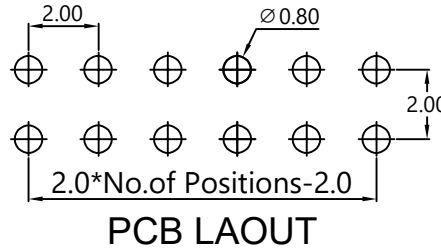


RoHS

受控

SPECIFICATION:

- Current Rating: 1.5A AC/DC
- Contact resistance: 20mΩ(Max).
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Operation Temperature: -40°C to +105°C
- Max Processing Temp: 230°C-260°C for 30-60 seconds
- Material:
- Insulator : Glass filled PA6T (UL94V-0), black
- Contacts: Brass

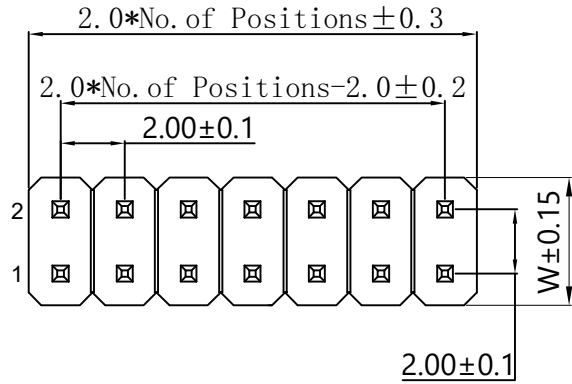

Ordering Information

PH200Hxxx ST- 2xx Lxxx G A 0 301

Insulator height: 150=1.50mm, 200=2.00mm
 No. of Pins: 220=2X20PIN, 770=7.70, 820=8.20, 870=8.70, 1550=15.50
 Plating: G=Gold Plated, T=Tin Plated, G2=Gold 2u", G10=Gold 10u"
 Material: A=PA6T
 Package: 0=PE Bag, 1=Tape&Reel, 2=Tube, 3=Tray

Dimension antitheses list				
PA	PC	W	L	H
3.90	2.80	4.00	7.70	1.50
3.90	2.80	4.00	8.20	1.50
3.90	2.80	4.00	8.70	2.00
10.50	3.00	4.00	15.50	2.00

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

AO	2021.06.09	NEW			OPERATION	DRAW	Peng	2017.06.11	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35			UNIT	mm		
					X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15			SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'	Lisa	2017.06.13	PROJ.	⊕	PART NO.	PH200HxxxST-2xxLxxxGA1301
					DIM	TOL					TITLE:	PH2.0 ST Gold flash PA6T 2XXPIN Double row PIN Header