
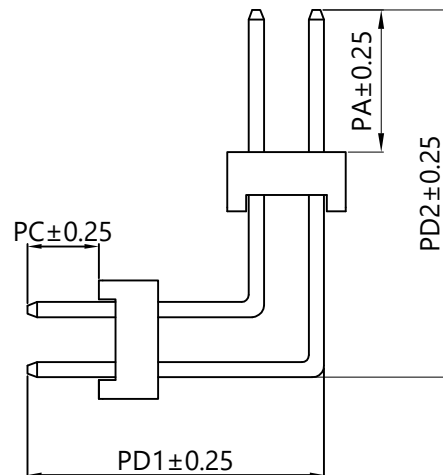
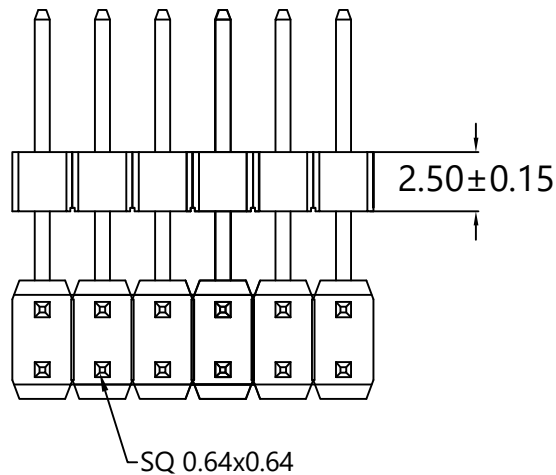
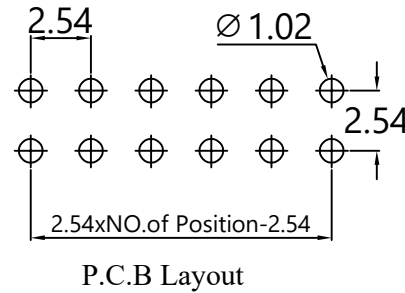


RoHS

受控

SPECIFICATION:

- Current Rating:3Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance:20mΩ Max
 - Withstanding Voltage: 550VAC(1Min)
 - Max Processing Temp:230°-260°for 10 s
 - Operation Temperature: -25℃ to +105℃
- Material:**
- Insulator (Housing):PA6T (UL94V-0)
 - Contacts:Brass
 - Contact Plated:Gold Plated

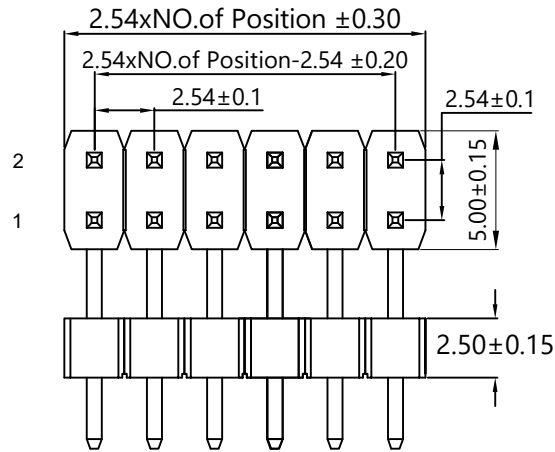

Ordering Information

PH254DH250 RTF-2xx G A 0 301

- Insulator height 250=2.50mm
- No.of Pins 220=2x20PIN
- Plating G=Gold Plated, S=Tin Plated
- Material A=PA6T
- Package 0=PE Bag, 1=Tape&Reel, 2=Tube, 3=Tray

Dimension antitheses list

| ITEM | PA | PD2 | PC | PD1 | LS | LL |
|-----------|------|-------|------|-------|-------|-------|
| Alternate | 6.00 | 15.50 | 3.00 | 12.50 | 22.00 | 27.00 |

SCONDAR ELECTRONIC LTD
ENGINEER LJU APPROVED

| | | | | | | | | | | | | |
|-----|------------|--------------------------|--------|---------|-----------|-------|---------|------------|-------|-----|--------------------------------|---|
| AO | 2021.06.08 | NEW | | | OPERATION | DRAW | LYao | 2013.06.11 | SCALE | - | SCONDAR ELECTRONIC LIMITED | |
| | | | | | X.X | ±0.35 | | | UNIT | mm | | |
| | | | | | X.XX | ±0.25 | | | SIZE | A4 | | |
| | | | | | X.XXX | ±0.15 | | | SHEET | 1/1 | PART NO. | PH254DH250RTF-2xxGA0301 |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE | Angle | ± 3' | | | PROJ. | ⊕ | TITLE: | PH2.54 DH2.50mm RTF Gold flash PA6T 2xxP Pin header |
| | | | | | DIM | TOL | APPROVE | | | | | |