



RoHS



受控



TYPE A

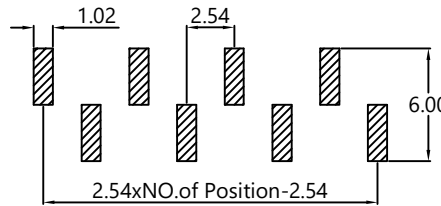

P.C.B Layout
TYPE A

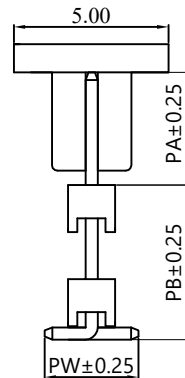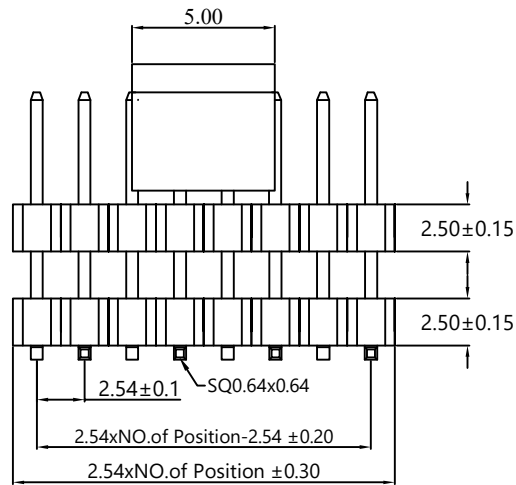

SPECIFICATION:

- Current Rating:3Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance:20mΩ Max
 - Withstanding Voltage: 550VAC(1Min)
 - Max Processing Temp:230°-260°for 10s
 - Operation Temperature: -25°C to +105°C
- Material:**
- Insulator (Housing):PA6T (UL94V-0)
 - Contacts:Brass
 - Contact Plated:Gold Plated

Ordering Information

PH254DH 250 SMT -1xx G A 1 301 A

Insulator height 250=2.50mm
 No.of Pins 106=1x6Pin
 Plating G=Gold Plated
 Material A=PA6T
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray
 PCB layout type A

Dimension antitheses list

ITEM	PA	PB	PW	L
Alternate	6.00	12.00	5.00	19.8

SCONDAR ELECTRONIC LTD
ENGINEER LJU APPROVED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	LYao	2017.07.12	SCALE	-	 SCONDAR ELECTRONIC LIMITED
AO	2021.04.12	NEW			X.X	±0.35			UNIT	mm	
					X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15		2017.07.13	SHEET	1/1	
					Angle	± 3'			PART NO.	PH254DH250SMT-1xxGA1301A	
					DIM	TOL			PROJ.	 TITLE: PH2.54 DH2.50 SMT Gold flash PA6T 1XXPIN header PCB layout Type A	