

RoHS



受控

SPECIFICATION:



- Current Rating:3Amps
- Insulation Resistance: 1000MΩ Min
- Contact Resistance:20mΩ Max
- Withstanding Voltage: 550VAC(1Min)
- Max Processing Temp:230°-260°for 10s
- Operation Temperature: -25°C to +105°C

Material:

- Insulator (Housing):PA6T (UL94V-0)
- Contacts:Brass
- Contact Plated:Gold Plated

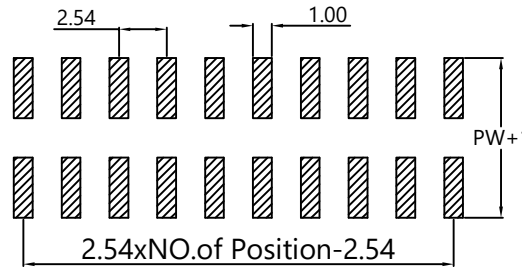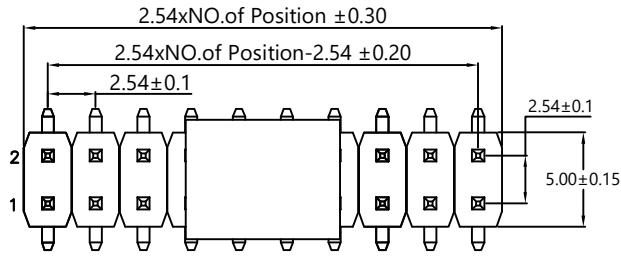

P.C.B Layout

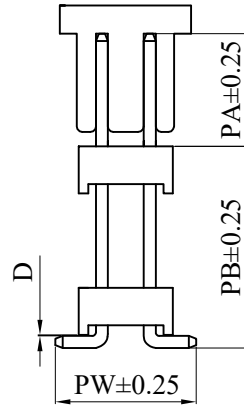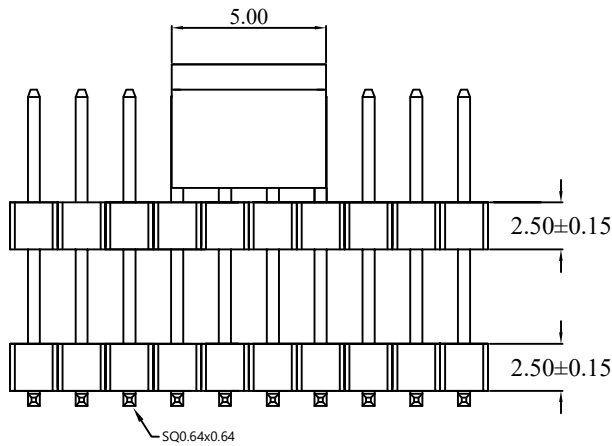

Ordering Information

PH254DH 250 SMT - 2xx L1980 G A 1 301

Insulator height 250=2.50mm
 No. of Pins 206=2x6PIN
 L1980=19.80mm
 Plating G=Gold Plated
 Material A=PA6T
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

Dimension antitheses list					
ITEM	PA	PB	PW	D	L
Alternate	6.00	12.00	7.50	0.10	19.80

SCONDAR ELECTRONIC LTD
 ENGINEER LJU APPROVED

AO	2021.04.12	NEW			OPERATION	DRAW	LYao	2017.06.21	SCALE	-	<p>SCONDAR ELECTRONIC LIMITED</p>
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	X.X ±0.35	DESIGN			UNIT	mm	
					X.XX ±0.25	CHECK	Lisa	2017.06.22	SIZE	A4	
					X.XXX ±0.15	APPROVE			SHEET	1/1	
					Angle ± 3'				PART NO.	PH254DH250SMT-2xxL1980GA1301	
					DIM TOL				TITLE:	PH2.54 DH2.50 SMT PW7.5 PB12.0 PA6.0 Gold flash PA6T 2XXPIN header	