
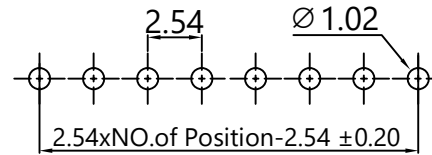


RoHS



受控

SPECIFICATION:

- Current Rating:3Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance:20mΩ Max
 - Withstanding Voltage: 550VAC(1Min)
 - Max Processing Temp:230°-260°for 10s
 - Operation Temperature: -25℃ to +105℃
- Material:**
- Insulator (Housing):PA6T (UL94V-0)
 - Contacts:Brass
 - Contact Plated:Gold Plated

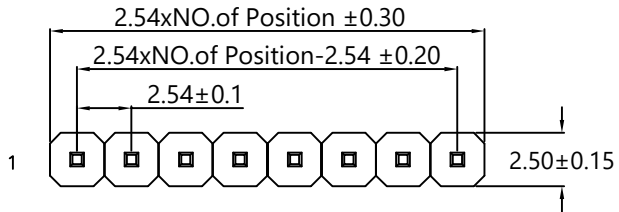

P.C.B Layout

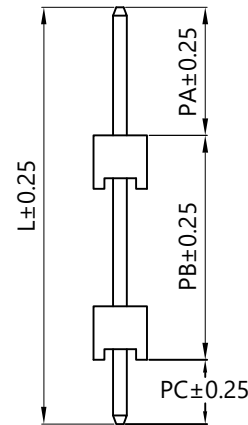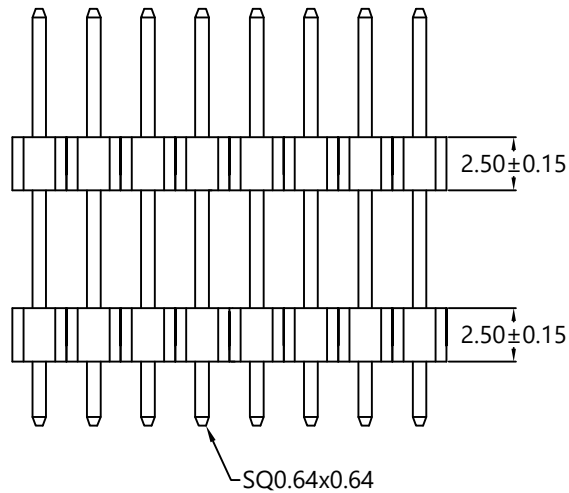

Ordering Information

PH254DH250 ST- 1xx Lxxx G A 0 301

Insulator height 250=2.50mm
 No. of Pins 120=1x20PIN
 length of Pins L1450=14.50mm L1900=19.00mm
 Plating G=Gold Plated S=Tin Plated
 Material A=PA6T
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

Dimension antitheses list

ITEM	PA	PB	PC	L
Alternate	3.00	8.50	3.00	14.50
Alternate	6.00	10.00	3.00	19.00

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

					OPERATION	DRAW	LYao	2015.03.12	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25				SIZE	A4		
AO	2021.03.03	NEW			X.XXX ±0.15	CHECK	Lisa	2015.04.14	SHEET	1/1		PART NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 3'	DIM	TOL	APPROVE	PROJ.	⊕	TITLE:	PH2.54 DH2.50mm ST Gold flash PA6T 1xxP Pin header