
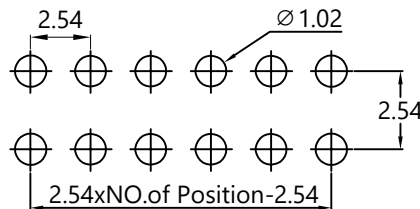


RoHS

受控

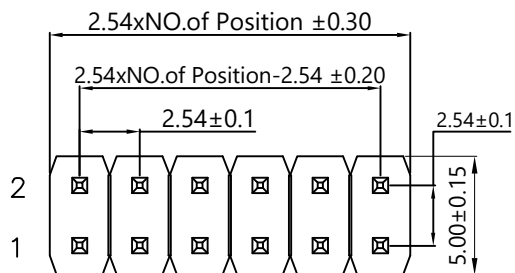



P.C.B Layout

SPECIFICATION:

- Current Rating:3Amps
- Insulation Resistance: 1000MΩ Min
- Contact Resistance:20mΩ Max
- Withstanding Voltage: 550VAC(1Min)
- Max Processing Temp:230°-260° for 10s
- Operation Temperature: -25°C to +105°C

Material:

- Insulator (Housing):PA6T (UL94V-0)
- Contacts:Brass
- Contact Plated:Gold Plated

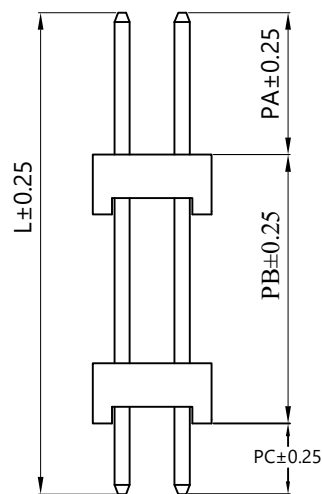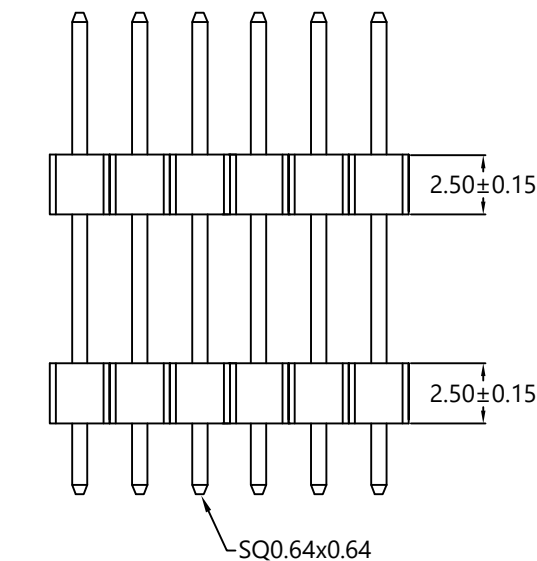

Ordering Information

PH254DH250 ST- 2xx Lxxx G A 0 301

- Insulator height 250=2.50mm
- No. of Pins 220=2x20PIN
- length of Pins L1350=13.50mm L2100=21.00mm
- Plating G=Gold Plated S=Tin Plated
- Material A=PA6T
- Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

Dimension antitheses list				
ITEM	PA	PB	PC	L
Alternate	2.50	8.50	2.50	13.50
Alternate	6.00	12.00	3.00	21.00

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

AO	2021.03.18	NEW			OPERATION	DRAW	LYao	2015.06.12	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35			UNIT	mm		
					X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15			SHEET	1/1	PART NO.	PH254DH250ST-2xxLxxxGA0301
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'			PROJ.	☺	TITLE:	PH2.54 DH2.50mm ST Gold flash PA6T 2xxP Pin header
					DIM	TOL						