
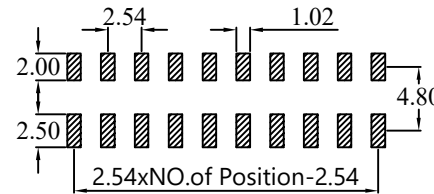


RoHS



受控

SPECIFICATION:

- Current Rating:3Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance:20mΩ Max
 - Withstanding Voltage: 550VAC(1Min)
 - Max Processing Temp:230°-260°for 10s
 - Operation Temperature: -25℃ to +105℃
- Material:**
- Insulator (Housing):PA6T (UL94V-0)
 - Contacts:Brass
 - Contact Plated:Gold Plated

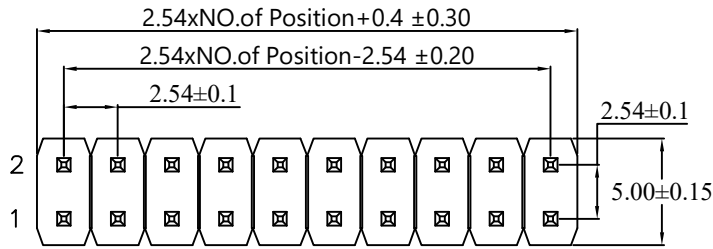

P.C.B Layout

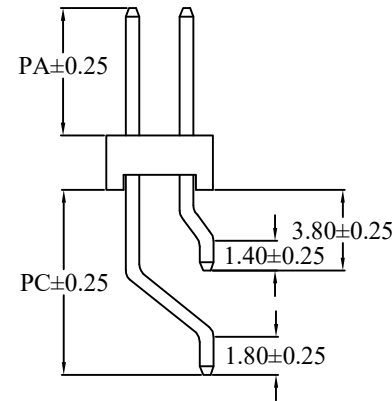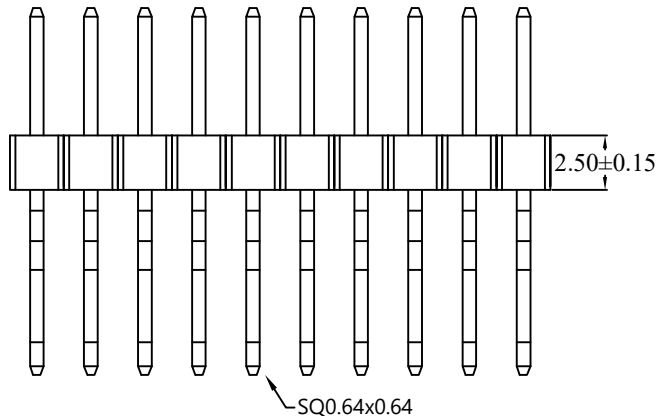

Ordering Information

PH254H250 RMT-2xx G A 1 301

Insulator height 250=2.50mm
 No.of Pins 220=2x20PIN
 Plating G=Gold Plated S=Tin Plated
 Material A=PA6T
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

SMT Right angle type

Dimension antitheses list

ITEM	PA	PC	LS	LL
Alternate	6.00	8.70	12.50	19.00

SCONDAR ELECTRONIC LTD
 ENGINEER LIU APPROVED

AO	2021.03.06	NEW			OPERATION	DRAW	LYao	2016.04.12	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35			UNIT	mm		
					X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15		2016.04.13	SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'			PROJ.	⊕	PART NO.	PH254H250RMT-2xxGA1301
					DIM	TOL					TITLE:	PH2.54 WR SMT H2.5 PA6.0 PC=8.7 Gold flash PA6T 2XXP Pin header