

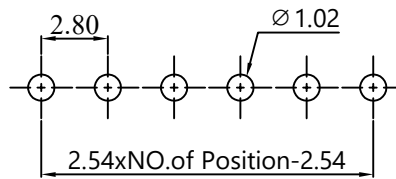
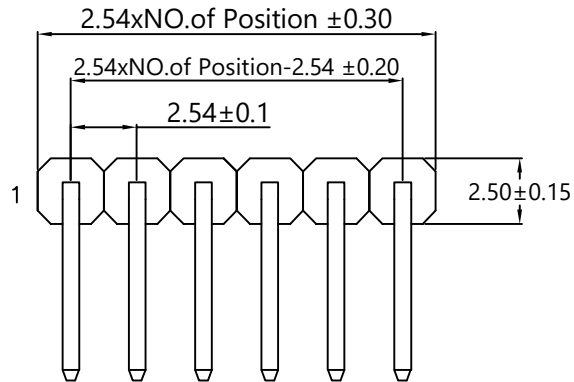


RoHS

受控

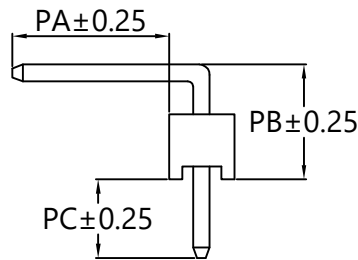

P.C.B Layout

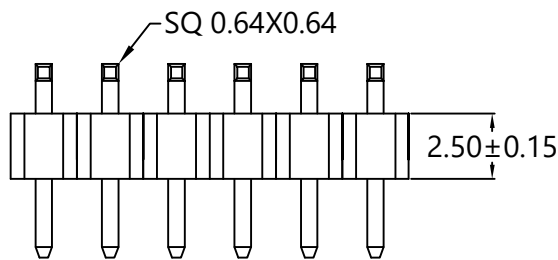

SPECIFICATION:

- Current Rating:3Amps
  - Insulation Resistance: 1000MΩ Min
  - Contact Resistance:20mΩ Max
  - Withstanding Voltage: 550VAC(1Min)
  - Max Processing Temp:230°-260°for 10 s
  - Operation Temperature: -25°C to +105°C
- Material:
- Insulator (Housing):PA6T (UL94V-0)
  - Contacts:Brass
  - Contact Plated:Gold Plated

Ordering Information

PH254H250 RTF- 1xx G A 0 301

Insulator height 250=2.50mm  
 No.of Pins 120=1x20PIN  
 Plating G=Gold Plated S=Tin Plated  
 Material A=PA6T  
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

Dimension antitheses list

ITEM	PA	PB	PC	L
Alternate	6.00	4.40	3.00	14.00

SCONDAR ELECTRONIC LTD  
ENGINEER LIU APPROVED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	LYao	2013.06.11	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
AO	2021.06.06	NEW			X.X	±0.35			UNIT	mm		
					X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15			SHEET	1/1		
					Angle	± 3'			PROJ.	⊕	PART NO.	PH254H250RTF-1xxGA0301
					DIM	TOL					TITLE:	PH2.54 H2.50mm RTF Gold flash PA6T 1xxP Pin header