

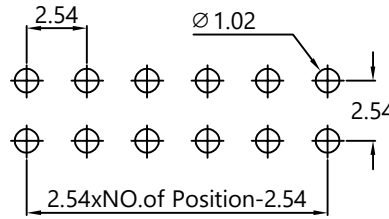
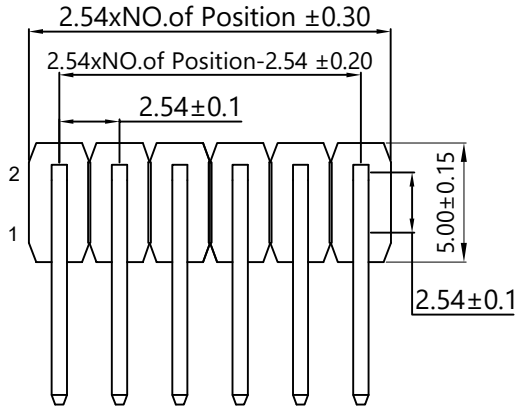


RoHS

受控

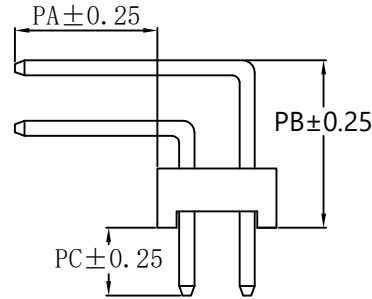

P.C.B Layout

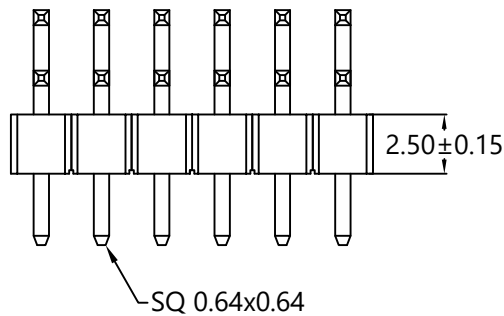

SPECIFICATION:

- Current Rating:3Amps
- Insulation Resistance: 1000MΩ Min
- Contact Resistance:20mΩ Max
- Withstanding Voltage: 550VAC(1Min)
- Max Processing Temp:230°-260°for 10 s
- Operation Temperature: -25℃ to +105℃

Material:

- Insulator (Housing):PA6T (UL94V-0)
- Contacts:Brass
- Contact Plated:Gold Plated

Ordering Information

PH254H250 RTF- 2xx G A 0 301

Insulator height 250=2.50mm
 No.of Pins 220=2x20PIN
 Plating G=Gold Plated S=Tin Plated
 Material A=PA6T
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

Dimension antitheses list

ITEM	PA	PB	PC	LS	LL
Alternate	6.00	6.90	3.00	14.00	19.00

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

					OPERATION	DRAW	LYao	2013.06.11	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X ±0.35	DESIGN			UNIT	mm	
					X.XX ±0.25	CHECK	Lisa	2013.06.12	SIZE	A4	
					X.XXX ±0.15	APPROVE			SHEET	1/1	
AO	2021.06.06		NEW		Angle ± 3'				PART NO.		PH254H250RTF-2xxGA0301
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	DIM TOL	APPROVE			PROJ.	TITLE:	PH2.54 H2.50mm RTF Gold flash PA6T 2xxP Pin header