



RoHS

受控





TYPE A

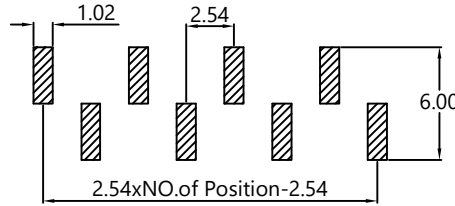

P.C.B Layout  
TYPE A

SPECIFICATION:

- Current Rating:3Amps
  - Insulation Resistance: 1000MΩ Min
  - Contact Resistance:20mΩ Max
  - Withstanding Voltage: 550VAC(1Min)
  - Max Processing Temp:230°-260°for 10s
  - Operation Temperature: -25°C to +105°C
- Material:
- Insulator (Housing):PA6T (UL94V-0)
  - Contacts:Brass
  - Contact Plated:Gold Plated

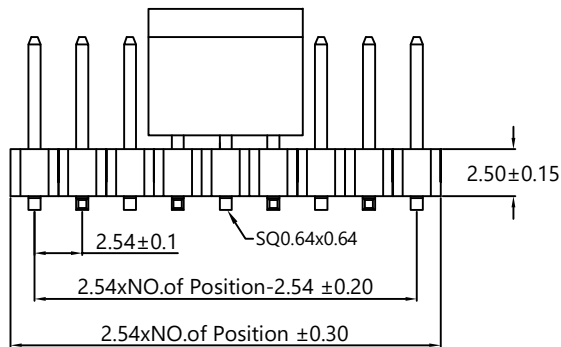

Ordering Information

PH254 H 250 SMT -1xx G A 1 301 A

Insulator height 250=2.50mm  
 No. of Pins 106=1x6Pin  
 Plating G=Gold Plated  
 Material A=PA6T  
 Package 0=PE Bag, 1=Tape&Reel, 2=Tube, 3=Tray  
 PCB layout type A

Dimension antitheses list				
ITEM	PA	PB	PW	L
Alternate	6.00	3.20	5.00	11.00

SCONDAR ELECTRONIC LTD  
ENGINEER LUJ APPROVED

AO	2021.04.12	NEW			OPERATION	DRAW	LYao	2017.06.12	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	±0.35			UNIT	mm		
					X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15		2017.06.13	SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'			PROJ.	⊕	PART NO.	PH254H250SMT-1xxGA1301A
					DIM	TOL	APPROVE			⊕	TITLE:	PH254 SMT H2.5 PA6.0 PW5.0 1XXP Gold flash PA6T PCB Layout TYPE A