



RoHS



受控



TYPE B

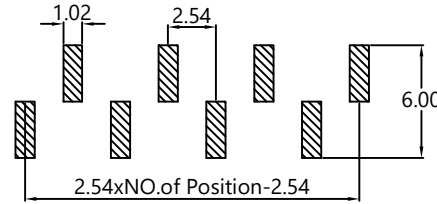

P.C.B Layout
TYPE B

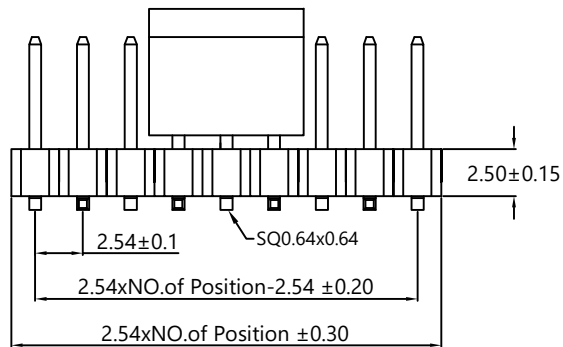

SPECIFICATION:

- Current Rating:3Amps
- Insulation Resistance: 1000MΩ Min
- Contact Resistance:20mΩ Max
- Withstanding Voltage: 550VAC(1Min)
- Max Processing Temp:230°-260°for 10s
- Operation Temperature: -25°C to +105°C
- Material:
- Insulator (Housing):PA6T (UL94V-0)
- Contacts:Brass
- Contact Plated:Gold Plated

Ordering Information

PH254 H 250 SMT -1xx G A 1 301 B

Insulator height 250=2.50mm
 No. of Pins 106=1x6Pin
 Plating G=Gold Plated
 Material A=PA6T
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray
 PCB layout type B

Dimension antitheses list				
ITEM	PA	PB	PW	L
Alternate	6.00	3.20	5.00	11.00

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

AO	2021.04.12	NEW			OPERATION	DRAW	LYao	2017.06.12	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25	CHECK	Lisa	2017.06.13	SIZE	A4		
					X.XXX ±0.15	APPROVE			SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 3'	DIM TOL			PROJ.	⊕	PART NO.	PH254H250SMT-1xxGA1301B
											TITLE:	PH254 SMT H2.5 PA6.0 PW5.0 1XXP Gold flash PA6T PCB Layout TYPE B