

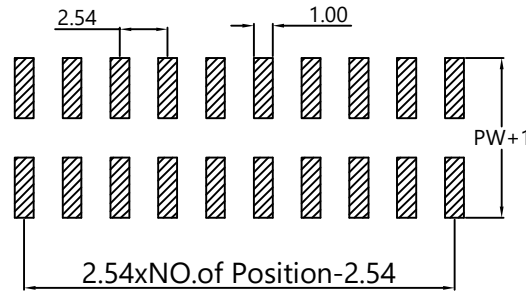
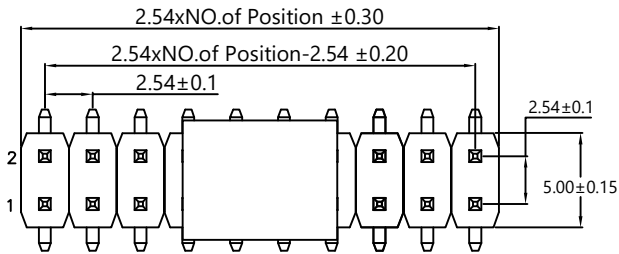


RoHS

受控



P.C.B Layout

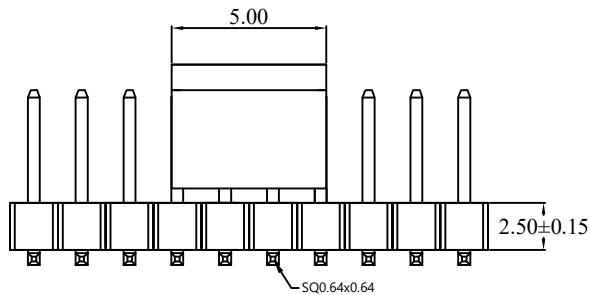

SPECIFICATION:

- Current Rating:3Amps
- Insulation Resistance: 1000MΩ Min
- Contact Resistance:20mΩ Max
- Withstanding Voltage: 550VAC(1Min)
- Max Processing Temp:230°-260°for 10s
- Operation Temperature: -25°C to +105°C

Material:

- Insulator (Housing):PA6T (UL94V-0)
- Contacts:Brass
- Contact Plated:Gold Plated

Ordering Information

PH254H 250 SMT - 2xx G A 1 301

Insulator height 250=2.50mm  
 No.of Pins 206=2x6PIN  
 Plating G=Gold Plated  
 Material A=PA6T  
 Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray

Dimension antitheses list

ITEM	PA	PB	PW	L
Alternate	6.00	3,20	7.50	11.00

SCONDAR ELECTRONIC LTD  
ENGINEER LIU APPROVED

OPERATION	DRAW	LYao	2017.06.14
X.X ±0.35	DESIGN	Lisa	2017.06.17
X.XX ±0.25			
X.XXX ±0.15	CHECK		
Angle ± 3'	APPROVE		
DIM TOL			

SCALE	-		SCONDAR ELECTRONIC LIMITED	
UNIT	mm		PART NO.	PH254H250SMT-2xxGA1301
SIZE	A4			
SHEET	1/1	TITLE:	PH2.54 H2.50 SMTGold flash PA6T 2XXPIN header	

AO	2021.04.12	NEW		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE