
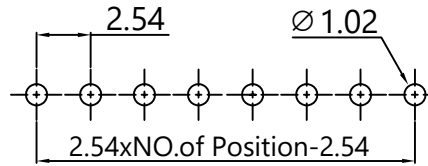


RoHS



受控

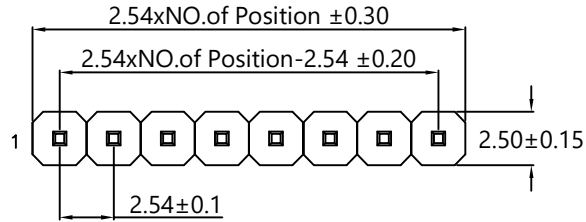

P.C.B Layout

SPECIFICATION:

- Current Rating:3Amps
  - Insulation Resistance: 1000MΩ Min
  - Contact Resistance:20mΩ Max
  - Withstanding Voltage: 550VAC(1Min)
  - Max Processing Temp:230°-260°for 10s
  - Operation Temperature: -25℃ to +105℃
- Material:
- Insulator (Housing):PA6T (UL94V-0)
  - Contacts:Brass
  - Contact Plated:Gold Plated

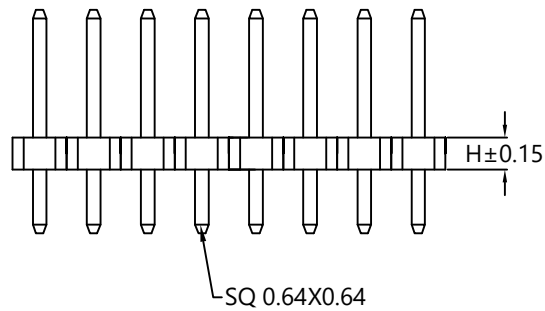

Ordering Information

PH254Hxxx ST- 1xx G A 0 301

Insulator height  
 150=1.50mm  
 200=2.00mm  
 250=2.50mm

No.of Pins  
 120=1x20PIN

Plating  
 G=Gold Plated  
 S=Tin Plated

Material  
 A=PA6T

Package  
 0=PE Bag  
 1=Tape&Reel  
 2=Tube  
 3=Tray

Dimension antitheses list

PA	PC	L	H
6.00	3.00	10.50	1.50
6.00	3.00	11.00	2.00
6.00	3.00	11.50	2.50

SCONDAR ELECTRONIC LTD  
ENGINEER LIU APPROVED

					OPERATION	DRAW	LYao	2017.06.12	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X	±0.35			UNIT	mm	
					X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15		2017.06.13	SHEET	1/1	
AO	2021.04.12	NEW			Angle	± 3'			PART NO.	PH254HxxxST-1xxGA0301	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE		PROJ.	TITLE:	PH2.54 header ST Gold flash PA6T 1xxP Pin