
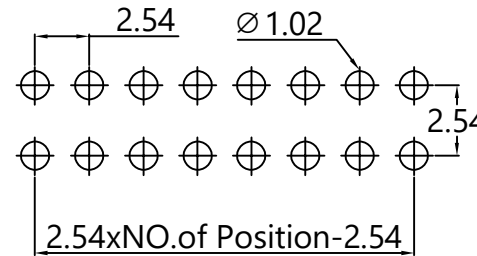


RoHS



受控

SPECIFICATION:

- Current Rating:3Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance:20mΩ Max
 - Withstanding Voltage: 550VAC(1Min)
 - Max Processing Temp:230°-260°for 10s
 - Operation Temperature: -25°C to +105°C
- Material:**
- Insulator (Housing):PA6T (UL94V-0)
 - Contacts:Brass
 - Contact Plated:Gold Plated

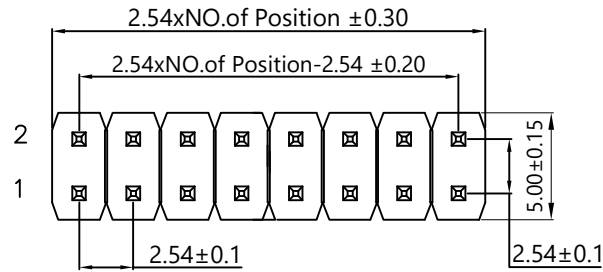

P.C.B Layout

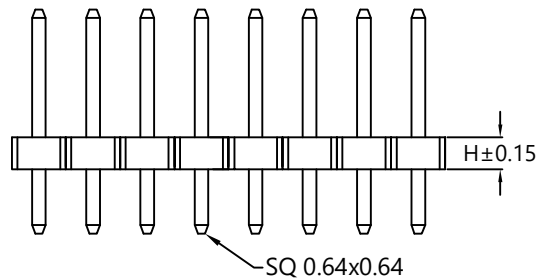

Ordering Information

PH254Hxxx ST- 2xx G A 0 301

Insulator height
150=1.50mm
200=2.00mm
250=2.50mm

No.of Pins
220=2x20PIN

Plating
G=Gold Plated
S=Tin Plated

Material
A=PA6T

Package
0=PE Bag
1=Tape&Reel
2=Tube
3=Tray

Dimension antitheses list

PA	PC	L	H
6.00	3.00	10.50	1.50
6.00	3.00	11.00	2.00
6.00	3.00	11.50	2.50

SCONDAR ELECTRONIC LTD
ENGINEER LTD APPROVED

OPERATION	DRAW	Yang	2017.06.12
X.X ±0.35	DESIGN		
X.XX ±0.25			
X.XXX ±0.15	CHECK	Lisa	2017.06.13
Angle ± 3'			
DIM TOL	APPROVE		

SCALE - UNIT mm SIZE A4 SHEET 1/1 PART NO. PH254HxxxST-2xxGA0301 PROJ. TITLE: PH2.54 ST Gold flash PA6T 2xxP Pin Header

SCONDAR
SCONDAR ELECTRONIC LIMITED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
AO	2021.04.12	NEW		