


RoHS



NOTE 1:

UL Standard

1. Rated voltage/Rated current:300V/2A

2. Withstanding Voltage:AC1600V/Min

3. Wire range:30~12AWG

IEC Standard

1. Rated voltage/Rated current: 250V/2A

2. Wire range : 0.2~0.5mm²




NOTE 2:

1. Pitch: 2.50mm

2. Operating temperature: -40℃~+105℃

3. Stripping length: 8.5~9.5mm

4. RoHS Compliance

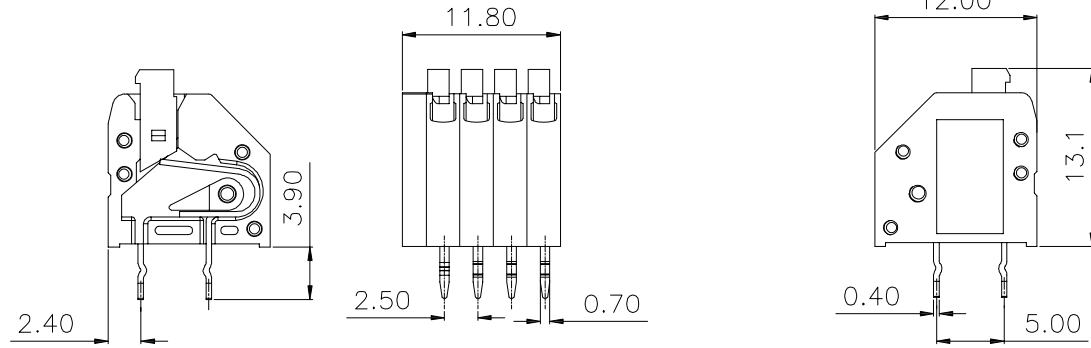

PCB LAYOUT

Ordering Information

SCT250A - 2.50 XX B 1 650

Series NO.

Pitch

No.of Pins
See Table

Material
B=PA66 V0

COLOUR

- 1. Gray 2. Blue
- 3. Black 4. Green
- 5. Orange 6. Red
- 7. Yellow 8. White
- 9. Transparent

东莞市晟凯达电子科技有限公司

工程专用章

受控

4	(Cage) 方盒	Copper alloy 铜合金	(Ni plated) 镀镍	距离公差 mm Pitch range in mm					其他尺寸公差 mm Nominal dimension range in mm					DRAW	Zhong	2020.08.02	SCALE	-	 SCONDAR ELECTRONIC LIMITED
3	(Contact) 触点	Copper alloy 铜合金	(Sn plated) 镀锡	≤6	6 ~ 10	10 ~ 24	≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150	0.1/10	DESIGN			UNIT	mm		
2	(Pin header) 焊脚	Steel 钢	(Ni plated) 镀镍										CHECK	Lisa	2020.08.02	SIZE	A4		
1	(Housing) 塑件	PA66	UL94V-0										APPROVE	Allen	2020.08.02	SHEET	1/1	PART NO.	
TEM	NAMF OF PART	MATFRIAL	NOTFS	±0.15	±0.20	±0.30	±0.20	±0.30	±0.50	±0.70	±1.00	±1'	PROJ.			PROJ.	⌀	TITLE:	/