
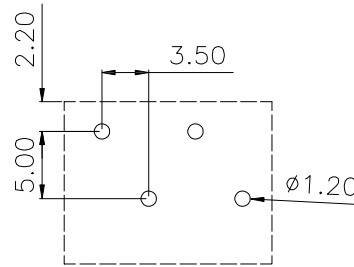
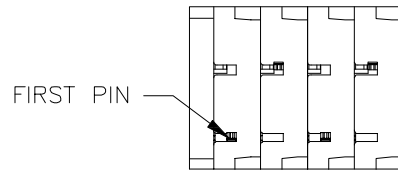
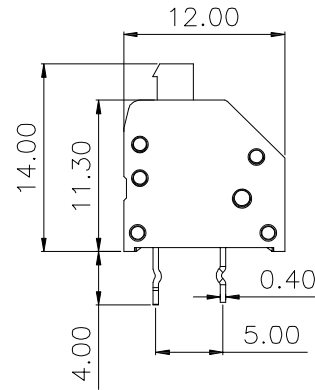


RoHS

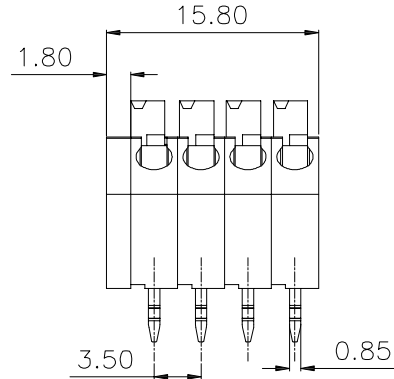

PCB LAYOUT

NOTE 1:

UL Standard

1. Rated voltage/Rated current: 300V/8A

2. Withstanding Voltage: AC1600V/Min

3. Wire range: 22~16AWG

IEC Standard

1. Rated voltage/Rated current: 320V/10A

2. Wire range : 0.2~1.5mm²

NOTE 2:

1. Pitch: 3.50mm

2. Operating temperature: -40°C~+105°C

3. Stripping length: 8.5~9.5mm

4. RoHS Compliance

Ordering Information

SCT250A - 3.50 XX B 1 650

Series NO. Pitch No. of Pins See Table Material B=PA66 V0 COLOUR
 1. Gray 2. Blue
 3. Black 4. Green
 5. Orange 6. Red
 7. Yellow 8. White
 9. Transparent

东莞市晟凯达电子科技有限公司
 工程专用章

受控

4	(Cage) 方盒	Copper alloy 铜合金	(Ni plated) 镀镍	距方向公差 mm			其他尺寸公差 mm					DRAW	Zhong	2020.08.02	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
3	(Contact) 触点	Copper alloy 铜合金	(Sn plated) 镀锡	Pitch range in mm			Nominal dimension range in mm					DESIGN			UNIT	mm		
2	(Pin header) 焊脚	Steel 钢	(Ni plated) 镀镍	≤6	6 ~ 10	10 ~ 24	≤30	30 ~ 60	60 ~ 100	100 ~ 150	≥150	0.1/10	CHECK	Lisa	2020.08.02	SIZE		A4
1	(Housing) 塑件	PA66	UL94V-0									APPROVE	Allen	2020.08.02	SHEET	1/1		PART NO.
TEM	NAMF OF PART	MATFRIAL	NOTFS	±0.15	±0.20	±0.30	±0.20	±0.30	±0.50	±0.70	±1.00	±1'	PROJ.	☯	TITLE:			