


RoHS

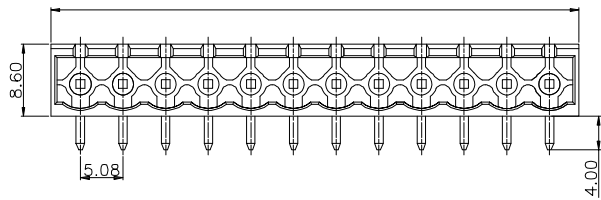

NOTE 1:

UL Standard

1. Rated voltage/Rated current: 300V/15A

2. Withstanding Voltage: AC1600V/Min
IEC Standard



1. Rated voltage/Rated current: 320V/10A

NOTE 2:

1. Pitch: 5.08mm

2. Operating temperature: -40°C ~ +105°C


3. RoHS Compliance

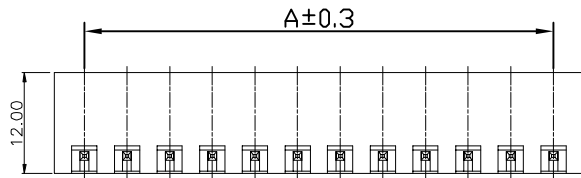

Ordering Information

SCT2EDGRC - 5.08-XX B 4 650

Series NO. Pitch No. of Pins See Table Material B=PA66 V0 COLOUR
1. Gray 2. Blue 3. Black
4. Green 5. Orange 6. Red
7. Yellow 8. White
9. Transparent



PCB LAYOUT

东莞市晟凯达电子科技有限公司
工程专用章

受控

Dimensions		Part NO	PIN
A	B		
5.08	10.16	SCT2EDGRC-5.08-02B4650	2
10.16	15.24	SCT2EDGRC-5.08-03B4650	3
15.24	20.32	SCT2EDGRC-5.08-04B4650	4
20.32	25.40	SCT2EDGRC-5.08-05B4650	5
25.40	30.48	SCT2EDGRC-5.08-06B4650	6
30.48	35.56	SCT2EDGRC-5.08-07B4650	7
35.56	40.64	SCT2EDGRC-5.08-08B4650	8
40.64	45.72	SCT2EDGRC-5.08-09B4650	9
45.72	50.80	SCT2EDGRC-5.08-10B4650	10
50.80	55.88	SCT2EDGRC-5.08-11B4650	11
55.88	60.96	SCT2EDGRC-5.08-12B4650	12
60.96	66.04	SCT2EDGRC-5.08-13B4650	13
66.04	71.12	SCT2EDGRC-5.08-14B4650	14
71.12	76.20	SCT2EDGRC-5.08-15B4650	15
76.20	81.28	SCT2EDGRC-5.08-16B4650	16
81.28	86.36	SCT2EDGRC-5.08-17B4650	17
86.36	91.44	SCT2EDGRC-5.08-18B4650	18
91.44	96.52	SCT2EDGRC-5.08-19B4650	19
96.52	101.60	SCT2EDGRC-5.08-20B4650	20

4	3	2	1	Pitch range in mm			Nominal dimension range in mm					0.1/10
				≤6	6 ~ 10	10 ~ 24	≤30	30 ~ 60	60 ~ 100	100 ~ 150	> 150	
4				±0.15	±0.20	±0.30	±0.20	±0.30	±0.50	±0.70	±1.00	±1'

DRAW	Zhong	2020.08.02	SCALE	-
DESIGN			UNIT	mm
CHECK	Lisa	2020.08.02	SIZE	A4
APPROVE	Allen	2020.08.02	SHEET	1/1
			PROJ.	☉

SCONDAR
SCONDAR ELECTRONIC LIMITED

PART NO. SCT2EDGRC-5.08-XXB4650

TITLE: /