

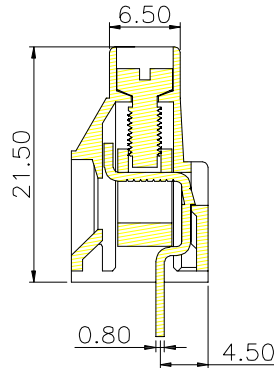
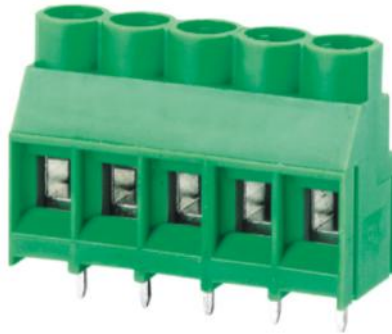
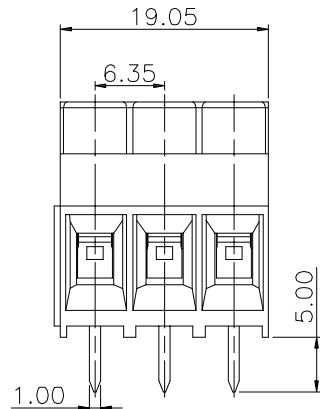


RoHS



PCB LAYOUT

NOTE 1:

UL Standard

1. Rated voltage/Rated current: 300V/15A

2. Withstanding Voltage: AC1600V/Min

3. Wire range: 28~12AWG

IEC Standard

1. Rated voltage/Rated current: 320V/20A

2. Wire range : 0.5~2.5mm²

NOTE 2:

1. Pitch: 6.35mm

2. Operating temperature: -40°C~+105°C

3. Stripping length: 7~8mm

4. RoHS Compliance

5. Rated torque: 4.43 [Lb. in]

Ordering Information

SCT635 - 6.35-03 B 4 650

Series NO.

Pitch

No of Pins
See Table

Material
B=PA66 V0

COLOUR

- 1. Gray 2. Blue
- 3. Black 4. Green
- 5. Orange 6. Red
- 7. Yellow 8. White
- 9. Transparent

东莞市晟凯达电子科技有限公司

工程专用章

受控

4	(Cage) 方盒	Copper alloy 铜合金	(Ni plated) 镀镍	Pitch 方向公差 (mm) Pitch range in mm	其他尺寸公差 mm Nominal dimension range in mm							0.1/10 ∠	DRAW	Zhong	2020.08.02	SCALE	-	SCONDAR SCONDAR ELECTRONIC LIMITED	
3	(Contact) 触点	Copper alloy 铜合金	(Sn plated) 镀锡		≤6	6 ~ 10	10 ~ 24	≤30	30 ~ 60	60 ~ 100	100 ~ 150		>150	DESIGN			UNIT		mm
2	(Screw) 螺丝 M3	Steel 钢	(Ni plated) 镀镍									CHECK	Lisa	2020.08.02	SIZE	A4	PART NO.	SCT635-6.35-03B4650	
1	(Housing) 塑件	PA66	UL94V-0									APPROVE	Allen	2020.08.02	SHEET	1/1			
TEM	NAMF OF PART	MATFRIAL	NOTFS	±0.15	±0.20	±0.30	±0.20	±0.30	±0.50	±0.70	±1.00	±1'	PROJ.	∅	TITLE:				