




RoHS

Ordering Information

FFC 125 B - xxP Lxxx S 1 - 44 88 407

Pitch 125=1.25mm Model No.of Pins See Table Long L130=130mm Coating G=Gold S=Tin UL Type 0=NO-UL 1=AWM 20624 80°C 60V VW-1 2=AWM 20706 105°C 60V VW-1 3=Other

Strip Length 44=S1/S2=4mm Reinforcing tape L 88=B1/B2=8mm

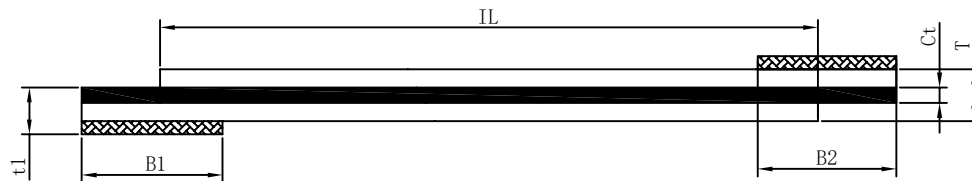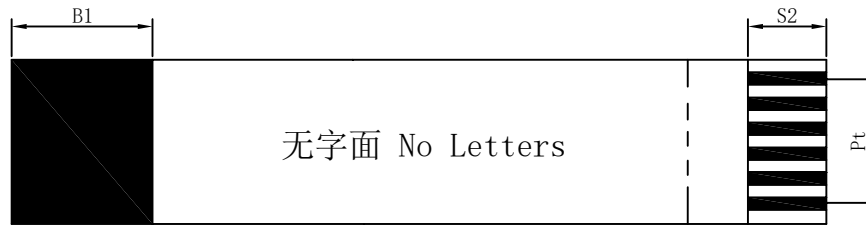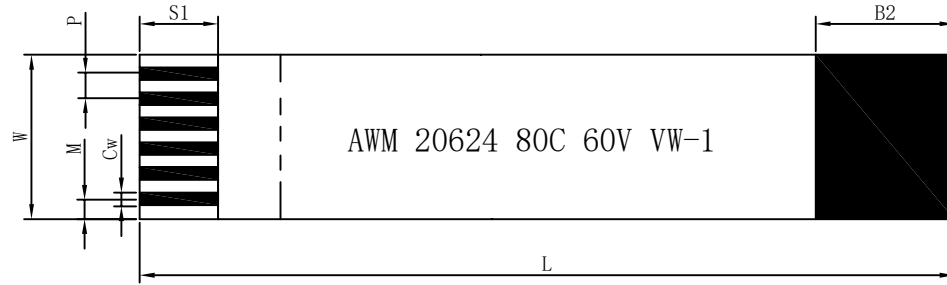

Item	项目	Specification	规格值
No.of conductors	导体芯数	N	3P-80P
Pith	间距	P	1.25±0.15
Total Pitch	全间距	Pt	1.25*(P-1)±0.15
Total Length	总长度	L	20-10000±(2-150)
Insulation Length	绝缘长度	IL	L-S1-S2±2.0
Margin Width	边缘宽度	M	1.25±0.2
Total Width	总宽度	W	1.25*(P+1)±0.2
Strip Length	线口长度	S1	4±1
Strip Length	线口长度	S2	4±1
Reinforeing tape length补强板长度		B1	8±2
Reinforeing tape length补强板长度		B2	8±2
Slanting	线口倾斜度	A	≤0.3
Slanting	线口倾斜度	B	≤0.5
Terminal thickness	插入厚度	t1	0.32±0.05
No.Thickness insulation	线身厚度	T	0.22±0.050
Conductor thickness	导体厚度	Ct	0.1±0.005
Conductor width	导体宽度	Cw	0.8±0.03
Supporting Tapc Color	补强板颜色		蓝色(Blue)
PET (Supporing Tapc Color)	补强板规格		0.16mm
PET (Insulation)	绝缘胶规格		0.06m(20624)
PET (Insulation)	绝缘胶规格		0.06mm(白膜)WT PET

		SCONDAR ELECTRONIC LTD ENGINEER 20241010		OPERATION		DRAW	Yao	2021.12.03	SCALE	-	 SCONDAR ELECTRONIC LIMITED						
				X.X	±0.35				DESIGN	Xiong		2021.12.04	UNIT	mm			
				X.XX	±0.25								CHECK	Lisa	2021.12.06	SIZE	A4
				X.XXX	±0.15											APPROVE	
A0	2021.12.06	NEW		Angle	± 3'	PART NO.	FFC125BxxPLxxxS1-4488407										
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	APPROVE	PROJ.	 TITLE:	1.25*(3P-80P)*(20-10000)*B 4/4/8/8(0.1x0.8) (6LT+6WT)SPET160						