
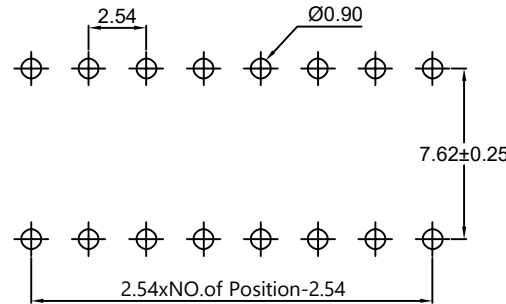




RoHS

SPECIFICATION:

- Current Rating: 3Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance: 20mΩ Max
 - Withstanding Voltage: 500VAC(1Min)
 - Max Processing Temp: 230°-260° for 30-60s
 - Operation Temperature: -40°C to +105°C
- Material:**
- Insulator (Housing): PA6T (UL94V-0)
 - Contacts: Brass
 - Contact Plated: Gold Plated or Tin Plated

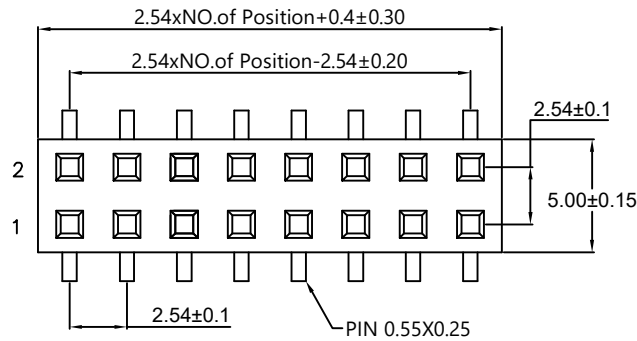

PCB LAYOUT

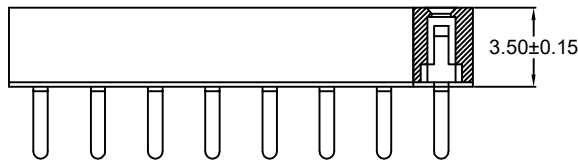

Ordering Information

FH254H350WRT-2xx G A 3 301

Insulator height
 350=3.50mm
 500=5.00mm

No. of Pins
 220=2X20PIN

Plating
 G=Gold Plated
 S= Tin Plated

Material
 A=PA6T

Package
 0=PE Bag
 1=Tape&Reel
 2=Tube
 3=Tray

H	W	PW	PL	PIN
3.50	5.00	7.62	3.00	0.55*0.25
5.00	5.00	7.62	3.00	0.60*0.25

SCONDR ELECTRONIC LTD
ENGINEER LIU APPROVED

AO	NEW			OPERATION	DRAW	YaoQ	2017.04.10	SCALE	-	 SCONDR ELECTRONIC LIMITED
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE				UNIT	mm	
								SIZE	A4	
								SHEET	1/1	
								PART NO.	FH254H350WRT-2xxGA3301	
								TITLE:	FH2.54 2XXPin WRT Female Header	