

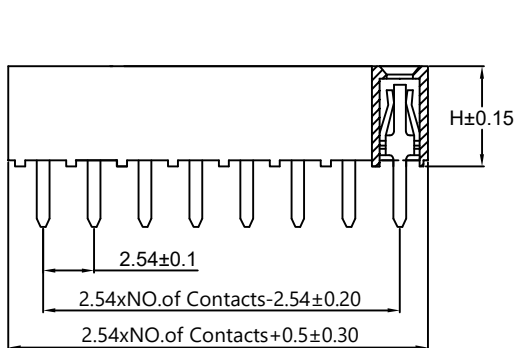
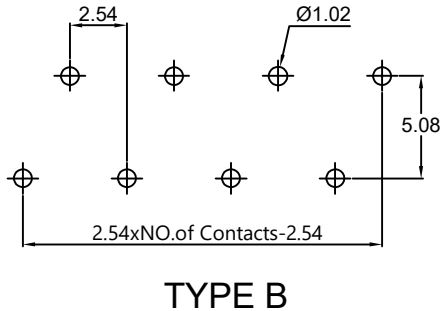


RoHS

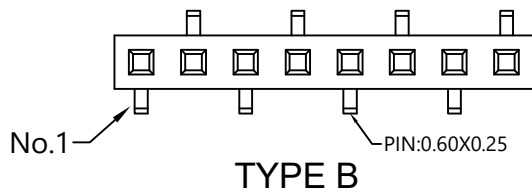

SPECIFICATION:

- Current Rating: 3Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance: 20mΩ Max
 - Withstanding Voltage: 500VAC(1Min)
 - Max Processing Temp: 230°-260° for 30-60s
 - Operation Temperature: -40°C to +105°C
- Material:
- Insulator (Housing): PA6T (UL94V-0)
 - Contacts: Brass
 - Contact Plated: Gold Plated or Tin Plated



Ordering Information

FH254H500WRT-1xx G A 3 301 B

Insulator height: 350=3.50mm, 500=5.00mm
 No. of Pins: 120=1X20PIN
 Plating: G=Gold Plated, S=Tin Plated
 Material: A=PA6T
 Package: 0=PE Bag, 1=Tape&Reel, 2=Tube, 3=Tray
 A=PCB type A, B=PCB type B

H	W	PW	PC	PIN
3.50	2.40	5.08	3.00	0.55*0.25
5.00	2.60	5.08	3.00	0.60*0.25

SCONDAR ELECTRONIC LTD
ENGINEER LTD APPROVED

					OPERATION	DRAW	YaoQ	2017.04.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X	±0.35			UNIT	mm	
					X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15			SHEET	1/1	
AO					Angle	± 3'			PART NO.	FH254H500WRT-1xxGA3301B	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE		PROJ.	 TITLE: FH2.54 1XXPin WRT Female Header PCB type B	