
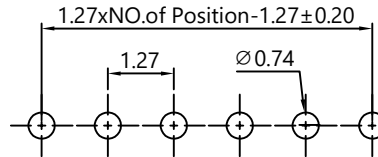


RoHS



受控

SPECIFICATION:

- Current Rating: 1 Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance: 20mΩ Max
 - Withstanding Voltage: 500VAC(1Min)
 - Max Processing Temp: 230°-260° for 10 s
 - Operation Temperature: -25°C to +105°C
- Material:**
- Insulator (Housing): PA6T (UL94V-0)
 - Contacts: Brass
 - Contact Plated: Gold Plated

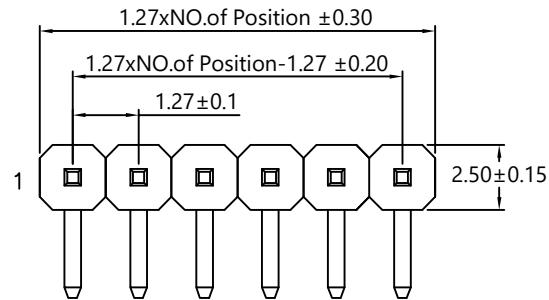

P.C.B Layout

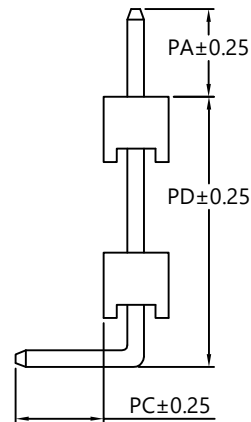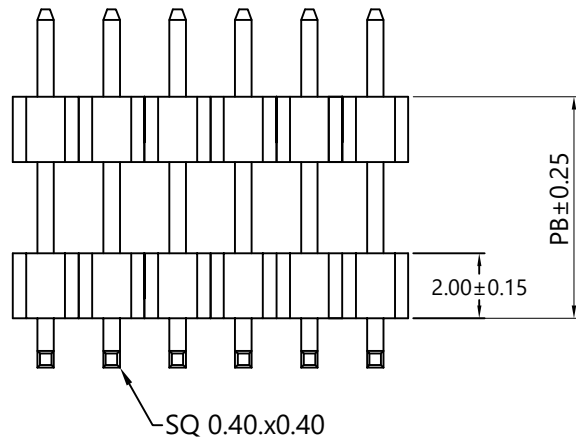

Ordering Information

PH127DH200 RT- 1xx G A 0 301

Insulator height 200=2.00mm
 No.of Pins 120=1x20PIN
 Plating G=Gold Plated
 Material A=PA6T
 Package 0=PE Bag

Dimension antitheses list

ITEM	PA	PD	PC	L
Alternate	3.00	8.00	3.00	15.00

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

					OPERATION	DRAW	YaoQ	2013.06.11	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN	LYao	2013.06.12	UNIT	mm		
					X.XX ±0.25				SIZE	A4		
AO		NEW			X.XXX ±0.15	CHECK	Lisa	2013.06.15	SHEET	1/1		PART NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	± 3' TOL	APPROVE		PROJ.	⊕	TITLE:	PH1.27 DH2.00mm RT Gold flash PA6T 1xxP Pin header