



RoHS



受控

**SPECIFICATION:**

- Current Rating:1Amps
  - Insulation Resistance: 1000MΩ Min
  - Contact Resistance:20mΩ Max
  - Withstanding Voltage: 500VAC(1Min)
  - Max Processing Temp:230°-260°for 10 s
  - Operation Temperature: -25℃ to +105℃
- Material:**
- Insulator (Housing):PA6T (UL94V-0)
  - Contacts:Brass
  - Contact Plated:Gold Plated

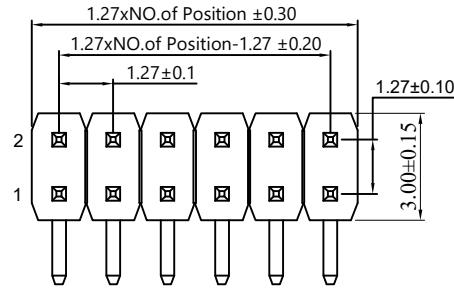

P.C.B Layout

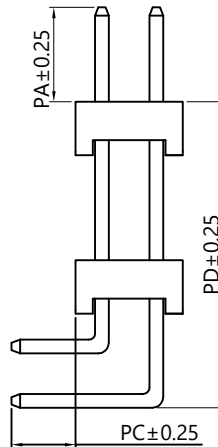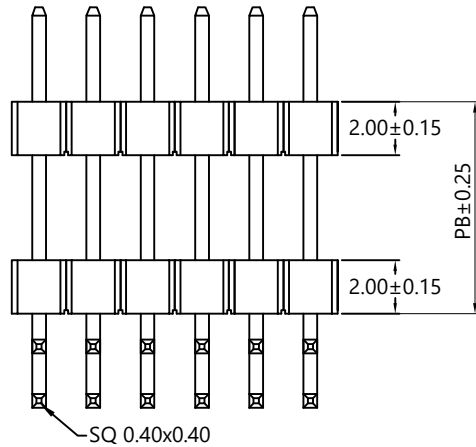

**Ordering Information**

PH127DH 200 RT- 2xx G A 0 301

Insulator height 200=2.00mm  
 No.of Pins 220=2x20PIN  
 Plating G=Gold Plated  
 Material A=PA6T  
 Package 0=PE Bag

**Dimension antitheses list**

ITEM	PA	PD	PC	LS	LL
Alternate	4.00	9.50	2.70	14.46	17.00

SCONDAR ELECTRONIC LTD  
ENGINEER LIU APPROVED

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	YaoQ	2013.06.11	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
AO		NEW			X.X	±0.35	DESIGN	LYao	2013.06.11	UNIT		mm
					X.XX	±0.25	CHECK	Lisa	2013.06.12	SIZE		A4
					X.XXX	±0.15	APPROVE			SHEET		1/1
					Angle	± 3'				PROJ.	↗	
					DIM	TOL				TITLE:	PH127DH200RT-2xxGA1301	
											PH1.27 DH2.00mm RT Gold flash PA6T 2xxP Pin header	