

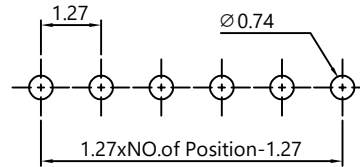
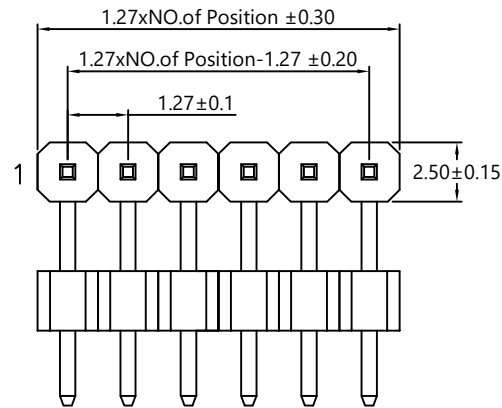


RoHS

受控

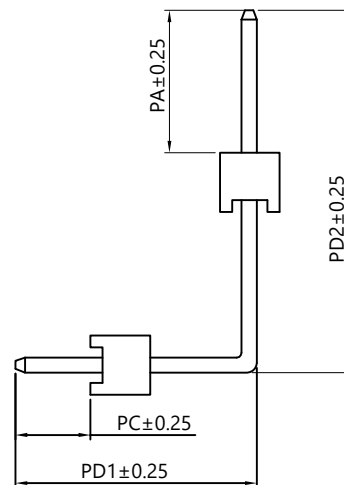

P.C.B Layout

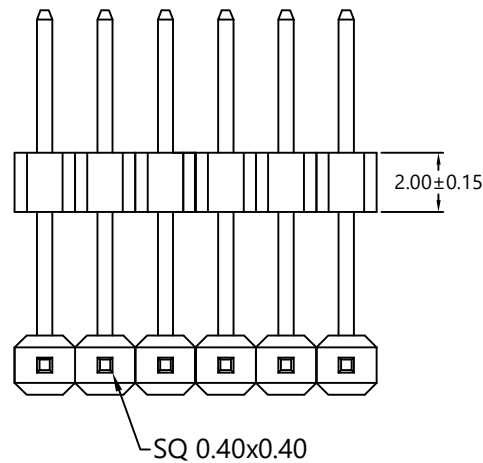

SPECIFICATION:

- Current Rating: 1 Amps
  - Insulation Resistance: 1000MΩ Min
  - Contact Resistance: 20mΩ Max
  - Withstanding Voltage: 500VAC(1Min)
  - Max Processing Temp: 230°-260° for 10 s
  - Operation Temperature: -25°C to +105°C
- Material:
- Insulator (Housing): PA6T (UL94V-0)
  - Contacts: Brass
  - Contact Plated: Gold Plated

Ordering Information

PH127DH200 RTF -1xx G A 0 301

Insulator height 200=2.00mm    No. of Pins 120=1x20PIN    Plating G=Gold Plated    Material A=PA6T    Package 0=PE Bag

Dimension antitheses list					
ITEM	PA	PD2	PC	PD1	L
Alternate	4.00	10.00	2.80	8.00	18.00

SCONDAR ELECTRONIC LTD  
ENGINEER LTD APPROVED

					OPERATION	DRAW	YaoQ	2013.06.11	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X	±0.35			UNIT	mm	
					X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15			SHEET	1/1	
AO	2021.06.08		NEW						PART NO.	PH127DH200RTF-1xxGA0301	
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE				PROJ.	 TITLE: PH1.27 DH2.00mm RT Gold flash PA6T 1xxP Pin header	