

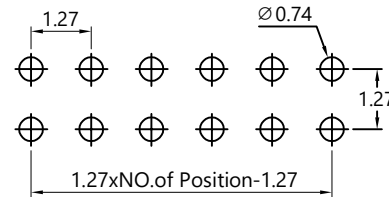
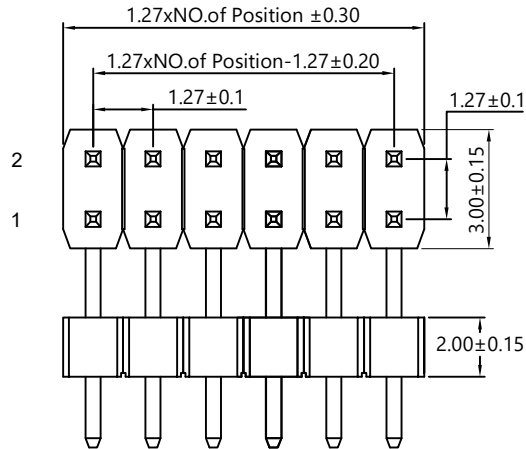


RoHS

受控

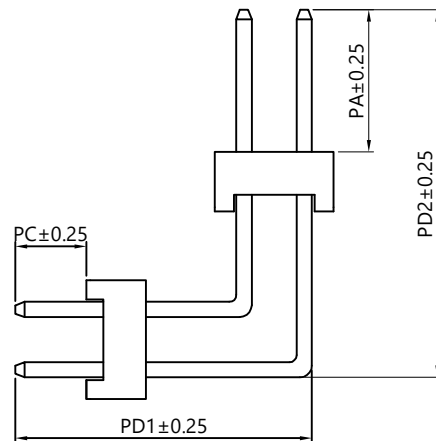

P.C.B Layout

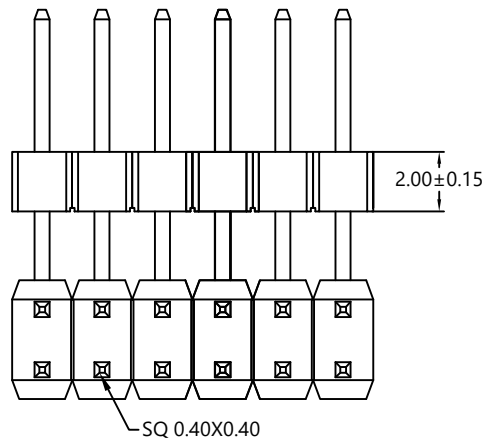

SPECIFICATION:

- Current Rating: 1 Amps
- Insulation Resistance: 1000MΩ Min
- Contact Resistance: 20mΩ Max
- Withstanding Voltage: 500VAC(1Min)
- Max Processing Temp: 230°-260° for 10 s
- Operation Temperature: -25°C to +105°C

Material:

- Insulator (Housing): PA6T (UL94V-0)
- Contacts: Brass
- Contact Plated: Gold Plated

Ordering Information

PH127DH200 RTF -2xx G A 0 301

Insulator height 200=2.00mm No. of Pins 220=2x20PIN Plating G=Gold Plated Material A=PA6T Package 0=PE Bag

Dimension antitheses list

ITEM	PA	PD2	PC	PD1	LS	LL
Alternate	4.00	10.00	2.80	8.00	15.46	18.00

		SCONDAR ELECTRONIC LTD ENGINEER LIU APPROVED		OPERATION		DRAW	YaoQ	2013.06.11	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
				X.X	±0.35	DESIGN	LYao	2013.06.11	UNIT	mm		
				X.XX	±0.25		CHECK	Lisa	2013.06.12	SIZE		A4
AO	2021.06.08	NEW		X.XXX	±0.15	APPROVE				SHEET		1/1
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL		PROJ.	☞	TITLE:	PH1.27 DH2.00mm RT Gold flash PA6T 2xxP Pin header