
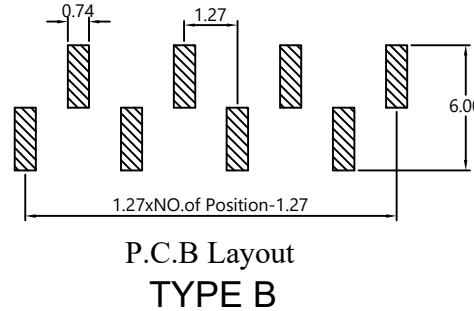




RoHS

受控

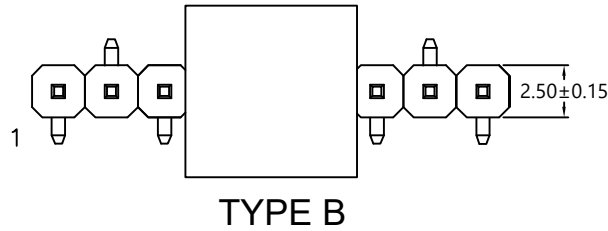

SPECIFICATION:

- Current Rating:3Amps
 - Insulation Resistance: 1000MΩ Min
 - Contact Resistance:20mΩ Max
 - Withstanding Voltage: 550VAC(1Min)
 - Max Processing Temp:230°-260° for 10s
 - Operation Temperature: -25°C to +105°C
- Material:
- Insulator (Housing):PA6T (UL94V-0)
 - Contacts:Brass
 - Contact Plated:Gold Plated

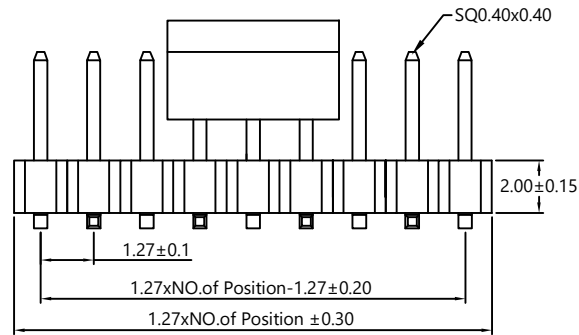

Ordering Information

PH127 H 200 SMT -1xx G A 1 301 B

Insulator height 200=2.00mm
 No. of Pins 106=1x6Pin
 Plating G=Gold Plated
 Material A=PA6T
 Package 1=Tape&Reel
 PCB layout type B

Dimension antitheses list				
ITEM	PA	PB	PW	L
Alternate	4.00	2.40	5.00	8.50

SCONDAR ELECTRONIC LTD
ENGINEER LIU APPROVED

AO	NEW			OPERATION	DRAW	YaoQ	2017.06.12	SCALE	-	 SCONDAR ELECTRONIC LIMITED
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	APPROVE	Lisa	2017.06.16	UNIT	mm	
								SHEET	1/1	
								PROJ.	⊕	
								PART NO.	PH127H200SMT-1xxGA1301B	
								TITLE:	PH127 SMT H2.00 PA4.0 PW5.0 1XXP Gold flash PA6T PCB Layout TYPE B	